

Virtuozzo

Virtuozzo Hybrid Infrastructure 6.0

Storage-as-a-Service Integration Guide

12/26/2023

Table of contents

Introduction	5
About this guide	5
About WHMCS	5
About S3 clusters	5
Integration methods	5
Integration via command-line interface	7
Managing S3 users via CLI	7
Adding S3 users via CLI	7
Listing S3 users via CLI	8
Querying S3 user information via CLI	8
Disabling and enabling S3 users via CLI	9
Deleting S3 users via CLI	9
Generating S3 user access key pairs via CLI	9
Revoking S3 user access key pairs via CLI	9
Managing S3 accounts via CLI	10
Creating S3 accounts via CLI	10
Listing S3 accounts via CLI	10
Querying S3 account information via CLI	10
Deleting S3 accounts via CLI	11
Generating S3 account access key pairs via CLI	11
Revoking S3 account access key pairs via CLI	11
Managing S3 user and bucket limits via CLI	11
Setting operations per second for users via CLI	11
Setting bandwidth per second for users via CLI	12
Querying user limits via CLI	12
Deleting user limits via CLI	12
Setting operations per second for buckets via CLI	13
Setting bandwidth per second for buckets via CLI	13
Querying bucket limits via CLI	13
Deleting bucket limits via CLI	13
Managing S3 user and bucket quotas via CLI	14
Setting quotas for users via CLI	14
Querying user quotas via CLI	14
Deleting user quotas via CLI	15
Setting quotas for buckets via CLI	15

Querying bucket quotas via CLI	15
Deleting bucket quotas via CLI	15
Setting default quotas via CLI	15
Querying default quotas via CLI	16
Deleting default quotas via CLI	16
Integration via REST API	17
Requirements for integration via REST API	17
Preparing the environment	17
Enabling statistics	18
Managing S3 users and listing buckets via REST API	19
Creating S3 users via REST API	19
Listing S3 users via REST API	19
Querying S3 users via REST API	20
Disabling and enabling S3 users via REST API	21
Deleting S3 users and buckets via REST API	21
Generating S3 user access keys via REST API	22
Revoking S3 user access keys via REST API	22
Listing user buckets via REST API	22
Managing S3 accounts via REST API	23
Creating S3 accounts via REST API	23
Deleting S3 accounts via REST API	23
Generating S3 account access keys via REST API	24
Revoking S3 account access keys via REST API	24
Managing S3 user and bucket limits via REST API	24
Setting operations per second for users via REST API	24
Setting bandwidth per second for users via REST API	25
Querying user limits via REST API	25
Deleting user limits via REST API	25
Setting operations per second for buckets via REST API	25
Setting bandwidth per second for buckets via REST API	25
Querying bucket limits via REST API	26
Deleting bucket limits via REST API	26
Managing S3 user and bucket quotas via REST API	26
Setting quotas for users via REST API	26
Querying user quotas via REST API	27
Deleting user quotas via REST API	27
Setting quotas for buckets via REST API	27

Querying bucket quotas via REST API	27
Deleting bucket quotas via REST API	27
Setting default quotas via REST API	28
Querying default quotas via REST API	28
Deleting default quotas via REST API	28
Obtaining usage statistics via REST API	28
Listing statistics objects via REST API	29
Querying statistics objects via REST API	29
Deleting statistics objects via REST API	30
Integration with WHMCS	31
Requirements	31
Configuration	32
Includes	33
Hooks	36
Statistics	44
Managing S3 users in WHMCS	44
Creating S3 users in WHMCS	44
Listing S3 users in WHMCS	46
Querying S3 users in WHMCS	47
Disabling S3 users in WHMCS	49
Enabling S3 users in WHMCS	50
Deleting S3 users in WHMCS	50
Generating S3 access keys in WHMCS	52
Revoking S3 access keys in WHMCS	53
Managing S3 user and bucket limits in WHMCS	54
Setting user limits in WHMCS	54
Querying user limits in WHMCS	56
Deleting user limits in WHMCS	57
Setting buckets limits in WHMCS	58
Querying bucket limits in WHMCS	59
Deleting bucket limits in WHMCS	60
Obtaining usage statistics in WHMCS	61
Listing statistics objects in WHMCS	61
Querying statistics objects in WHMCS	62
Deleting statistics objects in WHMCS	63

Introduction

About this guide

This document will help you integrate Amazon S3 compatible services into your WHMCS provisioning and billing system. The guide is primarily intended for developers who already have working storage clusters with properly configured Amazon S3-like roles and gateways.

In this document, you will find examples of integrating Virtuozzo Hybrid Infrastructure S3 clusters via CLI and REST API, as well as in WHMCS. Using this guide as a starting point, you will be able to create basic storage-as-a-service offerings based on Virtuozzo Hybrid Infrastructure.

About WHMCS

WHMCS is an all-in-one hosting automation platform with client management, provisioning of services, billing and support. It handles everything from signup to termination of customers. Its functionality is expandable with extensions, add-ons, and hooks executing third-party code on certain events. You can find more information about WHMCS at <https://www.whmcs.com/>.

About S3 clusters

Virtuozzo Hybrid Infrastructure allows you to export cluster disk space to customers in the form of an S3-like object-based storage.

Virtuozzo Hybrid Infrastructure is implemented as an Amazon S3-like API, which is one of the most common object storage APIs. End users can work with Virtuozzo Hybrid Infrastructure as they work with Amazon S3. You can use the usual applications for S3 and continue working with them after the data migration from Amazon S3 to Virtuozzo Hybrid Infrastructure.


More details on S3 clusters are provided in the Administrator Guide and Administrator Command Line Guide.

Integration methods

Virtuozzo Hybrid Infrastructure provides an orchestration representational state transfer (REST) API as well as an Amazon S3 compatible REST API.

With the orchestration API, you can manage users and buckets, configure user and bucket limits, and collect usage statistics. You can use the orchestration API by means of a single CLI tool shipped with Virtuozzo Hybrid Infrastructure.

The Amazon S3 compatible REST API also enables you to manage users and buckets, configure user and bucket limits, and collect usage statistics. The user model and access policies comply with those of Amazon S3.

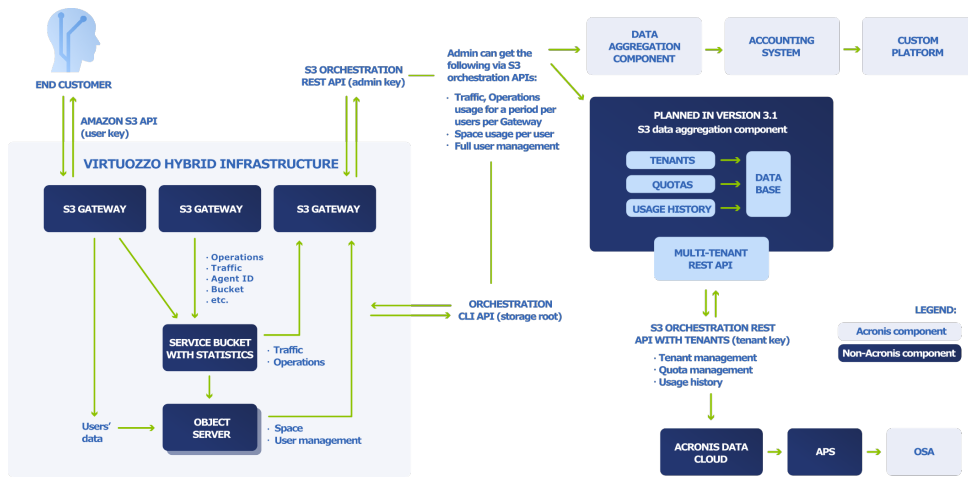

Integration via command-line interface

This chapter explains ways to use the command-line interface (CLI) to provision, enable, disable, and terminate S3 users and accounts, as well as set user and bucket limits for billing purposes.

Managing S3 users via CLI

The concept of an S3 user is one of the base concepts of object storage along with those of an object and a bucket (a container for storing objects). The Amazon S3 protocol uses a permission model based on access control lists (ACLs), where each bucket and each object are assigned an ACL that lists all users with access to the given resource and the type of this access (read, write, read ACL, or write ACL). The list of users includes the entity owner assigned to every object and bucket at creation. The entity owner has extra rights compared to other users. For example, the bucket owner is the only one who can delete that bucket.

User model and access policies implemented in Virtuozzo Hybrid Infrastructure comply with the Amazon S3 user model and access policies.

User management scenarios in Virtuozzo Hybrid Infrastructure are largely based on the Amazon Web Services user management and include the following operations: create, query, and delete users, as well as generate and revoke user access key pairs.

You can manage users with the `ostor-s3-admin` tool.

To do it via CLI, you will need to know the ID of the volume that they are in. You can obtain it with the `ostor-ctl get-config` command. For example:

```
# ostor-ctl get-config -n 10.94.97.195
VOL_ID          TYPE      STATE
0100000000000002  OBJ      READY
...
```

Note

As `ostor-s3-admin` commands are assumed to be issued by object storage administrators, they do not include any authentication or authorization checks.

Adding S3 users via CLI

You can generate a unique random S3 user ID and an access key pair (S3 Access Key ID, S3 Secret Access Key) using the `ostor-s3-admin create-user` command. You need to specify a user email. For example:

```
# ostor-s3-admin create-user -e user@email.com -V 0100000000000002
UserEmail:user@email.com
UserId:a49e12a226bd760f
KeyPair[0]:S3AccessKeyId:a49e12a226bd760fGHQ7
```

```
KeyPair[0]:S3SecretAccessKey:HSDu2DA00JNGjnRcAhLKfhrvlymzOVdLPsCK2dcq
Flags:none
```

S3 user ID is a 16-digit hexadecimal string. The generated access key pair is used to sign requests to the S3 object storage according to the Amazon S3 Signature Version 2 authentication scheme.

Listing S3 users via CLI

You can list all object storage users with the `ostor-s3-admin query-users` command. Information for each user can take one or more sequential rows in the table. Additional rows are used to lists S3 access key pairs associated with the user. If the user does not have any active key pairs, minus signs are shown instead. For example:

```
# ostor-s3-admin query-users -V 0100000000000002
      S3 USER ID      S3 ACCESS KEY ID      S3 SECRET ACCESS KEY  S3 USER EMAIL
bf0b3b15eb7c9019    bf0b3b15eb7c9019I36Y          *** user2@abc.com
d866d9d114cc3d20    d866d9d114cc3d20G456          *** user1@abc.com
                        d866d9d114cc3d20D8EW          ***
e86d1c19e616455    -                               - user3@abc.com
```

To output the list in XML, use the `-X` option; to output secret keys, use the `-a` option. For example:

```
# ostor-s3-admin query-users -V 0100000000000002 -a -X
<?xml version="1.0" encoding="UTF-
8"?><QueryUsersResult><Users><User><Id>a49e12a226bd760f</Id><Email>user@email.com</Email
><Keys><OwnerId>0000000000000000</OwnerId><KeyPair><S3AccessKeyId>a49e12a226bd760fGHQ7</
S3AccessKeyId><S3SecretAccessKey>HSDu2DA00JNGjnRcAhLKfhrvlymzOVdLPsCK2dcq</S3SecretAcces
sKey></KeyPair></Keys></User><User><Id>d7c53fc1f931661f</Id><Email>user@email.com</Email
><Keys><OwnerId>0000000000000000</OwnerId><KeyPair><S3AccessKeyId>d7c53fc1f931661fZLIV</
S3AccessKeyId><S3SecretAccessKey>JL7gt10H873zR0Fzv80h9ZuA6JtCVnkgV71ET6ET</S3SecretAcces
sKey></KeyPair></Keys></User></Users></QueryUsersResult>
```

Querying S3 user information via CLI

To display information about the specified user, use the `ostor-s3-admin query-user-info` command. You need to specify either the user email (`-e`) or S3 ID (`-i`). For example:

```
# ostor-s3-admin query-user-info -e user@email.com -V 0100000000000002
Query user: user id=d866d9d114cc3d20, user email=user@email.com
Key pair[0]: access key id=d866d9d114cc3d20G456,
secret access key=5EAne6PLL1jxprouRqq8hmfONMfgrJcOwbowCoTt
Key pair[1]: access key id=d866d9d114cc3d20D8EW,
secret access key=83tTsNAuuRyoBBqhxMFqHAC60dhKHtTCCKqE54zu
```


Disabling and enabling S3 users via CLI

You can disable a user with the `ostor-s3-admin disable-user` command. You need to specify either the user email (-e) or S3 ID (-i). For example:

```
# ostor-s3-admin disable-user -e user@email.com -V 0100000000000002
```

To enable a disabled user, use the `ostor-s3-admin enable-user` command. You need to specify either the user email (-e) or S3 ID (-i). For example:

```
# ostor-s3-admin enable-user -e user@email.com -V 0100000000000002
```

Deleting S3 users via CLI

You can delete existing object storage users with the `ostor-s3-admin delete-user` command. Users who own any buckets cannot be deleted, so delete user's buckets first. You need to specify either the user email (-e) or S3 ID (-i). For example:

```
# ostor-s3-admin delete-user -i bf0b3b15eb7c9019 -V 0100000000000002
Deleted user: user id=bf0b3b15eb7c9019
```

Generating S3 user access key pairs via CLI

You can generate a new access key pair for the specified user with the `ostor-s3-admin gen-access-key` command. The maximum of 2 active access key pairs are allowed per user (same as with the Amazon Web Services). You need to specify either the user email (-e) or S3 ID (-i). For example:

```
# ostor-s3-admin gen-access-key -e user@email.com -V 0100000000000002
Generate access key: user id=d866d9d114cc3d20, access key id=d866d9d114cc3d20D8EW,
secret access key=83tTsNAuuRyoBBqhxFqHAC60dhKHtTCckQe54zu
```

It is recommended to periodically revoke old and generate new access key pairs.

Revoking S3 user access key pairs via CLI

You can revoke the specified access key pair of the specified user with the `ostor-s3-admin revoke-access-key` command. You need to specify the access key in the key pair you want to delete as well as the user email or S3 ID. For example:

```
# ostor-s3-admin revoke-access-key -e user@email.com -k de86d1c19e616455YIPU -V
0100000000000002
Revoke access key: user id=de86d1c19e616455, access key id=de86d1c19e616455YIPU
```

Managing S3 accounts via CLI

This section describes how to manage S3 accounts via the command-line interface. A S3 account (project) is an isolated container of S3 user buckets with defined usage limits. An account is owned by a single user while a user can have multiple accounts.

Creating S3 accounts via CLI

You can create an account for an S3 user and generate an access key pair (S3 Access Key ID, S3 Secret Access Key) by using the `ostor-s3-admin create-account` command. You need to specify the user email and an account name. For example:

```
# ostor-s3-admin create-account -V 0100000000000002 -n account -e user@email.com
UserEmail:user@email.com
UserId:b09693b73b3c7686
AccountName:account
Flags:none
KeyPair[0]:S3AccessKeyId:b09693b73b3c7686ESY0
KeyPair[0]:S3SecretAccessKey:VxGZc12KKECUe1361IWrvXSVvZ0dZAsfg4pL4M7T
```

The first 16 symbols of the generated access key ID are equal to the user ID.

Listing S3 accounts via CLI

You can list all accounts of an S3 user with the `ostor-s3-admin list-user-accounts` command. Information for each account can take one or more sequential rows in the table. Additional rows are used to lists S3 access key pairs associated with the account. If the account does not have any active key pairs, they are not shown in the output. You need to specify either the user email (-e) or S3 ID (-i). For example:

```
# ostor-s3-admin list-user-accounts -V 0100000000000002 -e user@email.com
NAME      USER_ID      EMAIL      S3AccessKeyId      S3SecretAccessKey
account1  b09693b73b3c7686  user@email.com  b09693b73b3c768613NV ***
account2  b09693b73b3c7686  user@email.com  b09693b73b3c7686LCZ5 ***
                                     b09693b73b3c76866NI2 ***
account3  b09693b73b3c7686  user@email.com
```

Querying S3 account information via CLI

To display information about the specified account, use the `ostor-s3-admin query-account-info` command. You need to specify either the user email (-e) or S3 ID (-i) and the account name. For example:

```
# ostor-s3-admin query-account-info -V 0100000000000002 -n account -e user@email.com
UserEmail:user@email.com
UserId:b09693b73b3c7686
```

```
AccountName:account
Flags:none
KeyPair[0]:S3AccessKeyId:b09693b73b3c7686ESY0
KeyPair[0]:S3SecretAccessKey:VxGZc12KKECUe1361IWrvXSVvZ0dZAsfg4pL4M7T
```

Deleting S3 accounts via CLI

You can delete existing S3 accounts with the `ostor-s3-admin delete-account` command. You need to specify either the user email (-e) or S3 ID (-i) and the account name. For example:

```
# ostor-s3-admin delete-account -V 0100000000000002 -n account -e user@email.com
```

Generating S3 account access key pairs via CLI

You can generate a new access key pair for the specified account of an S3 user with the `ostor-s3-admin gen-access-key` command. The maximum of 2 active access key pairs are allowed per account. You need to specify either the user email (-e) or S3 ID (-i) and the account name. For example:

```
# ostor-s3-admin gen-access-key -V 0100000000000002 -n account -e user@email.com
S3AccessKeyId:b09693b73b3c7686WCF3
S3SecretAccessKey:GMzOPHJ66qbnxjrqFMHrN2fnxjkGf67u90Xec3PQ
```

It is recommended to periodically revoke old and generate new access key pairs.

Revoking S3 account access key pairs via CLI

You can revoke the specified access key pair for the specified account of an S3 user with the `ostor-s3-admin revoke-access-key` command. You need to specify the access key in the key pair you want to delete, as well as the user email (-e) or S3 ID (-i). For example:

```
# ostor-s3-admin revoke-access-key -e user@email.com -k de86d1c19e616455YIPU -V
0100000000000002
```

Managing S3 user and bucket limits via CLI

This section describes limits you can define for users and buckets via the command-line interface. You can apply the limits according to specific options that can be a part of your service plan.

Setting operations per second for users via CLI

You can limit operations rate with the `set-limits` command and the following parameters: -e specifying the email address, -t ops specifying the limit type, and -L default=, get=, put=, list=, or delete= specifying the limit key:

```
# ostor-s3-admin set-limits -e client@example.com -t ops -L get=3600
ops:default=0.00ops/s
ops:get=3600.00ops/s
ops:put=0.00ops/s
ops:list=0.00ops/s
ops:delete=0.00ops/s
bandwidth:out=0kbs/s
```

Setting bandwidth per second for users via CLI

You can limit outgoing bandwidth of a response with the `set-limits` command and the following parameters: `-e` specifying the email address, `-t` bandwidth specifying the limit type, and `-L out=` specifying the limit key:

```
# ostor-s3-admin set-limits -e client@example.com -t bandwidth -L out=100
ops:default=0.00ops/s
ops:get=3600.00ops/s
ops:put=0.00ops/s
ops:list=0.00ops/s
ops:delete=0.00ops/s
bandwidth:out=100kbs/s
```

Querying user limits via CLI

You can display the current limits with the `query-limits` command and parameter `-e` specifying the email address:

```
# ostor-s3-admin query-limits -e client@example.com
ops:default=0.00ops/s
ops:get=3600.00ops/s
ops:put=0.00ops/s
ops:list=0.00ops/s
ops:delete=0.00ops/s
bandwidth:out=100kbs/s
```

Deleting user limits via CLI

You can delete the current limits with the `rm-limits` command and parameter `-e` specifying the email address:

```
# ostor-s3-admin rm-limits -e client@example.com
ops:default=0.00ops/s
ops:get=0.00ops/s
ops:put=0.00ops/s
ops:list=0.00ops/s
ops:delete=0.00ops/s
bandwidth:out=0kbs/s
```

Setting operations per second for buckets via CLI

You can limit operations rate with the `set-limits` command and the following parameters: `-b` specifying the bucket name, `-t ops` specifying the limit type, and `-L default=, get=, put=, list=, or delete=` specifying the limit key:

```
# ostor-s3-admin set-limits -b example -t ops -L get=3600
ops:default=0.00ops/s
ops:get=3600.00ops/s
ops:put=0.00ops/s
ops:list=0.00ops/s
ops:delete=0.00ops/s
bandwidth:out=0kbs/s
```

Setting bandwidth per second for buckets via CLI

You can limit outgoing bandwidth of a response with the `set-limits` command and the following parameters: `-b` specifying the bucket name, `-t bandwidth` specifying the limit type, and `-L out=` specifying the limit key:

```
# ostor-s3-admin set-limits -b example -t bandwidth -L out=100
ops:default=0.00ops/s
ops:get=3600.00ops/s
ops:put=0.00ops/s
ops:list=0.00ops/s
ops:delete=0.00ops/s
bandwidth:out=100kbs/s
```

Querying bucket limits via CLI

You can display the current limits with the `query-limits` command and parameter `-b` specifying the bucket name:

```
# ostor-s3-admin query-limits -b example
ops:default=0.00ops/s
ops:get=3600.00ops/s
ops:put=0.00ops/s
ops:list=0.00ops/s
ops:delete=0.00ops/s
bandwidth:out=100kbs/s
```

Deleting bucket limits via CLI

You can delete the current limits with the `rm-limits` command and parameter `-b` specifying the bucket name:

```
# ostor-s3-admin rm-limits -b example
ops:default=0.00ops/s
ops:get=0.00ops/s
ops:put=0.00ops/s
ops:list=0.00ops/s
ops:delete=0.00ops/s
bandwidth:out=0kbs/s
```

Managing S3 user and bucket quotas via CLI

This section describes quotas you can define for S3 users and buckets via the command-line interface. These quotas limit object storage usage per user or per bucket. You can apply them to different users or buckets separately or set the default quotas to apply them to all S3 users and buckets by default.

Setting quotas for users via CLI

You can limit storage usage per user with the `set-quotas` command and the following parameters: `-e` specifying the email address or `-i` specifying the user ID, and `-q` specifying the usage limit in gigabytes:

```
# ostor-s3-admin set-quotas -e user@example.com -q 1024 -V 0100000000000002
version: '1'
size: '1024'
type: 'user'
```

```
# ostor-s3-admin set-quotas -i fa153230721eed05 -q 1024 -V 0100000000000002
version: '1'
size: '1024'
type: 'user'
```

Querying user quotas via CLI

You can display the specific quotas per user with the `query-quotas` command and the following parameters: `-e` specifying the email address or `-i` specifying the user ID:

```
# ostor-s3-admin query-quotas -e user@example.com -V 0100000000000002
version: '1'
size: '1024'
type: 'user'
```

```
# ostor-s3-admin query-quotas -i fa153230721eed05 -V 0100000000000002
version: '1'
size: '1024'
type: 'user'
```

Deleting user quotas via CLI

You can delete the current quotas per user with the `rm-quotas` command and the following parameters: `-e` specifying the email address or `-i` specifying the user ID:

```
# ostor-s3-admin rm-quotas -e user@example.com -V 0100000000000002  
successfully removed quotas
```

```
# ostor-s3-admin rm-quotas -i fa153230721eed05 -V 0100000000000002  
successfully removed quotas
```

Setting quotas for buckets via CLI

You can limit storage usage per bucket with the `set-quotas` command and the following parameters: `-b` specifying the bucket name and `-q` specifying the usage limit in gigabytes:

```
# ostor-s3-admin set-quotas -b bucket1 -q 256 -V 0100000000000002  
version: '1'  
size: '256'  
type: 'bucket'
```

Querying bucket quotas via CLI

You can display the specific quotas per bucket with the `query-quotas` command and parameter `-b` specifying the bucket name:

```
# ostor-s3-admin query-quotas -b bucket1 -V 0100000000000002  
version: '1'  
size: '256'  
type: 'bucket'
```

Deleting bucket quotas via CLI

You can delete the current quotas per bucket with the `rm-quotas` command and parameter `-b` specifying the bucket name:

```
# ostor-s3-admin rm-quotas -b bucket1 -V 0100000000000002  
successfully removed quotas
```

Setting default quotas via CLI

You can limit storage usage for all users or buckets by default with the `set-quotas` command and the following parameters: `-o` specifying user for users or bucket for buckets, and `-q` specifying the usage limit in gigabytes:

```
# ostor-s3-admin set-quotas -o user -q 1024 -V 0100000000000002
version: '1'
size: '1024'
type: 'user'
```

```
# ostor-s3-admin set-quotas -o bucket -q 256 -V 0100000000000002
version: '1'
size: '256'
type: 'bucket'
```

Querying default quotas via CLI

You can display the default quotas for all users or buckets with the `query-quotas` command and the following parameters: `-o` specifying user for users or bucket for buckets:

```
# ostor-s3-admin query-quotas -o user -V 0100000000000002
version: '1'
size: '1024'
type: 'user'
```

```
# ostor-s3-admin query-quotas -o bucket -V 0100000000000002
version: '1'
size: '256'
type: 'bucket'
```

Deleting default quotas via CLI

You can delete the current default quotas for all users or buckets with the `rm-quotas` command and the following parameters: `-o` specifying user for users or bucket for buckets:

```
# ostor-s3-admin rm-quotas -o user -V 0100000000000002
successfully removed quotas
```

```
# ostor-s3-admin rm-quotas -o bucket -V 0100000000000002
successfully removed quotas
```


Integration via REST API

This chapter explains ways to provision, enable, disable, and terminate S3 users and accounts, as well as set user and bucket limits for billing purposes.

The provided examples are Bash commands with which you can send requests to S3 cluster's REST API via cURL and OpenSSL. Responses are in JSON format and can be processed further with tools like `json_pp` or `json_reformat`.

Note

Replace `http://s3.example.com` in examples with your actual S3 gateway URL.

Requirements for integration via REST API

Any operation or management request must be authenticated with a signed request via Signature Version 2 or 4 of the Amazon S3 protocol of the corresponding S3 system user. To authenticate API requests, you need to create a system user. First, obtain the volume ID with the `ostor-ctl get-config` command. For example:

```
# ostor-ctl get-config -n 10.94.97.195
VOL_ID          TYPE      STATE
010000000000002  OBJ      READY
...
```

Then, create a system user on any storage node in the cluster with the `ostor-s3-admin create-user -S -e <email>` command. For example:

```
# ostor-s3-admin create-user -S -e user@example.com -V 010000000000002
UserEmail:user@example.com
UserId:a14040e0b2ef8b28
KeyPair[0]:S3AccessKeyId:a14040e0b2ef8b28FZZ8
KeyPair[0]:S3SecretAccessKey:dbwTnQTW602aAAdq8DQVFzB6yrTCFTNiGB8C8RFA
Flags:system
```

With this user, you can now authenticate further API requests for managing the S3 cluster. You can create multiple system accounts for different types of management operations.

Preparing the environment

Examples in this chapter use cURL for authentication as well as GET, PUT, POST, and DELETE requests run in Bash. To make sending requests easier, you can create the following script `~/s3_environment`, replacing `s3_key` with `S3AccessKeyId` and `s3_secret` with `S3SecretAccessKey` of a system user:

```
# S3 login variables.
s3_key="a14040e0b2ef8b28FZZ8"
s3_secret="dbwTnQTW602aAAdq8DQVFzB6yrTCFTNiGB8C8RFA"
```

```

# Sign S3 requests and run curl.
function s3_curl() {

    # Parse command line.
    [ -z "${2}" ] && {
        echo "Usage: ${FUNCNAME[0]} <request_type> <s3_url>"
        return 1
    }

    # Prepare a signature.
    s3_url="${2%/*}"
    s3_host="${s3_url##*/}"
    s3_query="${2##*/}"
    s3_date="$(date -R)"

    # Generate a signature.
    s3_signature="$(echo -en "${1}\n\n${s3_date}\n/${s3_query%%&*}" | \
        openssl dgst -sha1 -hmac ${s3_secret} -binary | base64)"

    # Make the request.
    curl -H "Host: ${s3_host}" \
        -H "Accept: */*" \
        -H "Date: ${s3_date}" \
        -H "Authorization: AWS ${s3_key}:${s3_signature}" \
        -X "${1}" \
        "${s3_url}/${s3_query}"
}

```

Load the script into your default environment to make the `s3_curl` function available.

```
# source ~/.s3_environment
```

Once the script is loaded, you can make S3 requests using `s3_curl`.

Enabling statistics

You need to have statistics collection enabled on your S3 gateway. The S3 gateway will save the statistics as regular storage objects. On each S3 storage node, create a file `/var/lib/ostor/local/gw.conf` with the following contents:

```
# Enable usage statistics collection.
S3_GW_COLLECT_STAT=1
```

Restart the S3 storage service to apply the configuration changes. Run the following command on all S3 storage nodes:

```
# systemctl restart ostor-agentd.service
```

Managing S3 users and listing buckets via REST API

This section describes how to manage users via the REST API in a service provider scenario. New customers will sign up for the service during purchase in your online store and you will need to create users for them in the S3 cluster.

Creating S3 users via REST API

You can create an S3 user by sending a PUT request to the `ostor-users` service along with an email address:

```
# s3_curl PUT "http://s3.example.com/?ostor-users&emailAddress=user@example.com"
{
  "UserEmail": "user@example.com",
  "UserId": "ca55631f9f3d59dc",
  "AWSAccessKeys": [
    {
      "AWSAccessKeyId": "ca55631f9f3d59dcDF4M",
      "AWSSecretAccessKey": "QCb17BzeepyvUAdJeFNFYW9fCzbq0uFa16e5pGm"
    }
  ]
}
```

Listing S3 users via REST API

You can list information about all users by sending a GET request to the `ostor-users` service. Additional rows may list S3 access key pairs associated with each user. For example:

```
# s3_curl GET "http://s3.example.com/?ostor-users"
[
  {
    "UserEmail": "user@example.com",
    "UserId": "a14040e0b2ef8b28",
    "State": "enabled",
    "OwnerId": "0000000000000000"
  },
  {
    "UserEmail": "user@example.com",
    "UserId": "ca55631f9f3d59dc",
    "State": "enabled",
    "OwnerId": "0000000000000000"
  }
]
```

Querying S3 users via REST API

You can display information, status, and all accounts of a user by sending a GET request to the `ostor-users` service along with the user email address:

```
# s3_curl GET "http://s3.example.com/?ostor-users&emailAddress=user@email.com"
{
  "UserEmail": "user@email.com",
  "UserId": "b09693b73b3c7686",
  "State": "enabled",
  "OwnerId": "0000000000000000",
  "Flags": [],
  "AWSAccessKeys": [
    {
      "AWSAccessKeyId": "b09693b73b3c7686FIGH",
      "AWSSecretAccessKey": "j02p4JBN1tWc4FEGxwZ8qW2jPCJBYP8RJ4KgBcZP"
    }
  ],
  "AccountCount": "3",
  "Accounts": [
    {
      "Name": "account1",
      "AWSAccessKeys": [
        {
          "AWSAccessKeyId": "b09693b73b3c768613NV",
          "AWSSecretAccessKey": "CBUpFmnpUGlXskTivgDQu4qjYksWpceGZeH6Qyct"
        }
      ]
    },
    {
      "Name": "account2",
      "AWSAccessKeys": [
        {
          "AWSAccessKeyId": "b09693b73b3c7686LCZ5",
          "AWSSecretAccessKey": "xLpUDFJMFM05rR9acAbUDp1rPqIO6fneKNFjEB5c"
        },
        {
          "AWSAccessKeyId": "b09693b73b3c76866NI2",
          "AWSSecretAccessKey": "ajowU8pWSGW5ZJhA7AR90jTrt11HmHPCJsMd247W"
        }
      ]
    },
    {
      "Name": "account3",
      "AWSAccessKeys": []
    }
  ]
}
```

Disabling and enabling S3 users via REST API

You can disable a user (users are enabled by default) by sending a POST request to the `ostor-users` service along with the user email address and the `disable` parameter:

```
# s3_curl POST "http://s3.example.com/?ostor-  
users&emailAddress=user@example.com&disable"
```

You can enable a previously disabled user by sending a POST request to the `ostor-users` service along with the user email address and the `enable` parameter:

```
# s3_curl POST "http://s3.example.com/?ostor-users&emailAddress=user@example.com&enable"
```

Deleting S3 users and buckets via REST API

You can delete an existing user by sending a DELETE request to the `ostor-users` service along with the user email address:

```
# s3_curl DELETE "http://s3.example.com/?ostor-users&emailAddress=user@example.com"
```

Users who own buckets cannot be removed until their buckets are deleted. To get a list of user's buckets, send a GET request to the `ostor-buckets` service along with the user email address:

```
# s3_curl GET "http://s3.example.com/?ostor-buckets&emailAddress=user@example.com"  
{  
  "Buckets": [  
    {  
      "size": {  
        "current": 12288,  
        "h_integral": 7360512,  
        "hmax": 12288,  
        "last_ts": 424241  
      },  
      "epoch": 0,  
      "owner_id": "ba7eba06129464c5",  
      "name": "bucketname",  
      "creation_date": "2018-05-25T17:12:00.000Z"  
    }  
  ]  
}
```

You can then delete buckets by name:

```
# s3_curl DELETE "http://s3.example.com/bucketname"
```

Generating S3 user access keys via REST API

You can generate a new or additional access key pair for the specified user by sending a POST request to the `ostor-users` service along with the user email address and the `genKey` parameter:

```
# s3_curl POST "http://s3.example.com/?ostor-users&emailAddress=user@example.com&genKey"
{
  "UserEmail": "user@example.com",
  "UserId": "ca55631f9f3d59dc",
  "AWSAccessKeys": [
    {
      "AWSAccessKeyId": "ca55631f9f3d59dcZMDX",
      "AWSSecretAccessKey": "ffWvnOcNiH0jkQod4huv51BMYBuSws4zRLFVwd4d"
    }
  ]
}
```

Revoking S3 user access keys via REST API

You can revoke the specified access key pair of the specified user by sending a POST request to the `ostor-users` service along with the user email address and access key in the key pair:

```
# s3_curl POST "http://s3.example.com/?ostor-users&emailAddress=user@example.com&revokeKey=ca55631f9f3d59dcZMDX"
```

Listing user buckets via REST API

You can list all buckets in S3 with the `ostor-buckets` service:

```
# s3_curl GET "http://s3.example.com/?ostor-buckets"
{
  "Buckets": [
    {
      "size": {
        "current": 12288,
        "h_integral": 7360512,
        "hmax": 12288,
        "last_ts": 424241
      },
      "epoch": 0,
      "owner_id": "ba7eba06129464c5",
      "name": "bucket1",
      "creation_date": "2018-05-25T17:12:00.000Z"
    },
    {
      "size": {
        "current": 46700160,
        "h_integral": 28160196480,

```

```

        "hmax": 46700160,
        "last_ts": 424237
    },
    "epoch": 0,
    "owner_id": "ccbec013d9fd3918",
    "name": "bucket2",
    "creation_date": "2018-05-25T13:51:55.000Z"
},
{
    "size": {
        "current": 12288,
        "h_integral": 8036352,
        "hmax": 12288,
        "last_ts": 424186
    },
    "epoch": 0,
    "owner_id": "9d80d59edbe2862a",
    "name": "bucket3",
    "creation_date": "2018-05-23T10:30:49.000Z"
}
]}

```

Managing S3 accounts via REST API

This section describes how to manage S3 accounts via the REST API in a service provider scenario. A S3 account (project) is an isolated container of S3 user buckets with defined usage limits. An account is owned by a single user while a user can have multiple accounts.

Creating S3 accounts via REST API

You can create an account for an S3 user by sending a PUT request to the `ostor-accounts` service along with the user email address and an account name:

```

# s3_curl POST "http://s3.example.com/?ostor-accounts&emailAddress=user@email.com&accountName=account"
{
  "Name": "account",
  "AWSAccessKeys": [
    {
      "AWSAccessKeyId": "bc6265392b818465V8NZ",
      "AWSSecretAccessKey": "KcPbLkq0rbtLXCn3UgqAz3CEurRXtikrT9ZeDVFa"
    }
  ]
}

```

Deleting S3 accounts via REST API

You can delete an existing account of an S3 user by sending a DELETE request to the `ostor-accounts` service along with the user email address and account name:

```
# s3_curl DELETE "http://s3.example.com/?ostor-accounts&emailAddress=user@example.com&accountName=account"
```

Generating S3 account access keys via REST API

You can generate a new or additional access key pair for the specified account of an S3 user by sending a POST request to the `ostor-users` service along with the user email address, account name, and the `genKey` parameter:

```
# s3_curl POST "http://s3.example.com/?ostor-users&emailAddress=user@email.com&accountName=account&genKey"
{
  "UserEmail": "user@email.com",
  "UserId": "b09693b73b3c7686",
  "AWSAccessKeys": [
    {
      "AWSAccessKeyId": "b09693b73b3c7686Z8BU",
      "AWSSecretAccessKey": "m8PgWFLXPeJVSwojCE3DxWDoRk80g7CMYB7xK3Hd"
    }
  ]
}
```

Revoking S3 account access keys via REST API

You can revoke the specified access key pair for the specified account of an S3 user by sending a POST request to the `ostor-users` service along with the user email address, account name, and access key in the key pair:

```
# s3_curl POST "http://s3.example.com/?ostor-users&emailAddress=user@example.com&accountName=account&revokeKey=ca55631f9f3d59dcZMDX"
```

Managing S3 user and bucket limits via REST API

This section describes limits you can define for users and buckets via REST API. You can apply the limits according to specific options that can be a part of your service plan.

Setting operations per second for users via REST API

You can limit operations rate with the `ostor-limits` service and the following parameters: `emailAddress` specifying the email address, `ops` specifying the limit type, and `default=`, `get=`, `put=`, `list=`, or `delete=` specifying the limit value:

```
# s3_curl PUT "http://s3.example.com/?ostor-limits&emailAddress=client@example.com&limit-type=ops&limit-resource=get&limit-value=3600"
```


Setting bandwidth per second for users via REST API

You can limit outgoing bandwidth of a response with the `ostor-limits` service and the following parameters: `emailAddress` specifying the email address, `bandwidth` specifying the limit type, and `out=` specifying the limit value:

```
# s3_curl PUT "http://s3.example.com/?ostor-  
limits&emailAddress=client@example.com&limit-type=bandwidth&limit-resource=out&limit-  
value=100"
```

Querying user limits via REST API

You can display the current limits with the `ostor-limits` service and parameter `emailAddress` specifying the email address:

```
# s3_curl GET "http://s3.example.com/?ostor-limits&emailAddress=client@example.com"  
{  
  "ops:default": "0.00",  
  "ops:get": "3600.00",  
  "ops:put": "0.00",  
  "ops:list": "0.00",  
  "ops:delete": "0.00",  
  "bandwidth:out": "100"  
}
```

Deleting user limits via REST API

You can delete the current limits with the `ostor-limits` service and parameter `emailAddress` specifying the email address:

```
# s3_curl DELETE "http://s3.example.com/?ostor-limits&emailAddress=client@example.com"
```

Setting operations per second for buckets via REST API

You can limit operations rate with the `ostor-limits` service and the following parameters: `bucket` specifying the bucket name, `ops` specifying the limit type, and `default=`, `get=`, `put=`, `list=`, or `delete=` specifying the limit value:

```
# s3_curl PUT "http://s3.example.com/?ostor-limits&bucket=client&limit-type=ops&limit-  
resource=get&limit-value=3600"
```

Setting bandwidth per second for buckets via REST API

You can limit outgoing bandwidth of a response with the `ostor-limits` service and the following parameters: `bucket` specifying the bucket name, `bandwidth` specifying the limit type, and `out=`

specifying the limit value:

```
# s3_curl PUT "http://s3.example.com/?ostor-limits&bucket=client&limit-  
type=bandwidth&limit-resource=out&limit-value=100"
```

Querying bucket limits via REST API

You can display the current limits with the `ostor-limits` service and parameter `bucket` specifying the bucket name:

```
# s3_curl GET "http://s3.example.com/?ostor-limits&bucket=client"  
{  
  "ops:default": "0.00",  
  "ops:get": "3600.00",  
  "ops:put": "0.00",  
  "ops:list": "0.00",  
  "ops:delete": "0.00",  
  "bandwidth:out": "100"  
}
```

Deleting bucket limits via REST API

You can delete the current limits with the `ostor-limits` service and parameter `bucket` specifying the bucket name:

```
# s3_curl DELETE "http://s3.example.com/?ostor-limits&bucket=client"
```

Managing S3 user and bucket quotas via REST API

This section describes quotas you can define for S3 users and buckets via REST API. These quotas limit object storage usage per user or per bucket. You can apply them to different users or buckets separately or set the default quotas to apply them to all S3 users and buckets by default.

Before setting quotas on S3 storage usage, run the `ostor-ctl add-acc` command specifying the volume ID and the path to the storage:

```
# ostor-ctl add-acc -V 0100000000000002 -s /mnt/vstorage/vols/ostor
```

Setting quotas for users via REST API

You can limit storage usage per user with the `ostor-quotas` service and the following parameters: `emailAddress` specifying the email address and `quota-size` specifying the usage limit in gigabytes:

```
# s3_curl PUT "http://s3.example.com/?ostor-quotas&emailAddress=user@example.com&quota-  
size=1024"
```

Querying user quotas via REST API

You can display the specific quotas per user with the `ostor-quotas` service and parameter `emailAddress` specifying the email address:

```
# s3_curl GET "http://s3.example.com/?ostor-quotas&emailAddress=user@example.com"
{
  "version": "1",
  "type": "user",
  "size": "1024"
}
```

Deleting user quotas via REST API

You can delete the current quotas per user with the `ostor-quotas` service and parameter `emailAddress` specifying the email address:

```
# s3_curl DELETE "http://s3.example.com/?ostor-quotas&emailAddress=user@example.com"
```

Setting quotas for buckets via REST API

You can limit storage usage per bucket with the `ostor-quotas` service and the following parameters: `bucket` specifying the bucket name and `quota-size` specifying the usage limit in gigabytes:

```
# s3_curl PUT "http://s3.example.com/?ostor-quotas&bucket=bucket1&quota-size=256"
```

Querying bucket quotas via REST API

You can display the specific quotas per bucket with the `ostor-quotas` service and parameter `bucket` specifying the bucket name:

```
# s3_curl GET "http://s3.example.com/?ostor-quotas&bucket=bucket1"
{
  "version": "1",
  "type": "bucket",
  "size": "256"
}
```

Deleting bucket quotas via REST API

You can delete the current quotas per bucket with the `ostor-quotas` service and parameter `bucket` specifying the bucket name:

```
# s3_curl DELETE "http://s3.example.com/?ostor-quotas&bucket=bucket1"
```

Setting default quotas via REST API

You can limit storage usage for all users or buckets by default with the `ostor-quotas` service and the following parameters: `default` specifying user for users or bucket for buckets and `quota-size` specifying the usage limit in gigabytes:

```
# s3_curl PUT "http://s3.example.com/?ostor-quotas&default=user&quota-size=1024"
```

```
# s3_curl PUT "http://s3.example.com/?ostor-quotas&default=bucket&quota-size=256"
```

Querying default quotas via REST API

You can display the default quotas for all users or buckets with the `ostor-quotas` service and the following parameters: `default` specifying user for users or bucket for buckets:

```
# s3_curl GET "http://s3.example.com/?ostor-quotas&default=user"
{
  "version": "1",
  "type": "user",
  "size": "1024"
}
```

```
# s3_curl GET "http://s3.example.com/?ostor-quotas&default=bucket"
{
  "version": "1",
  "type": "bucket",
  "size": "256"
}
```

Deleting default quotas via REST API

You can delete the current default quotas for all users or buckets with the `ostor-quotas` service and the following parameters: `default` specifying user for users or bucket for buckets:

```
# s3_curl DELETE "http://s3.example.com/?ostor-quotas&default=user"
```

```
# s3_curl DELETE "http://s3.example.com/?ostor-quotas&default=bucket"
```

Obtaining usage statistics via REST API

This section describes how to obtain usage statistics via REST API for billing or other purposes.

Note

Delete statistics objects after collecting the required data.

Listing statistics objects via REST API

You can list all available statistics objects with the `ostor-usage` service and no parameters. The output only contains objects that have not been deleted. For example:

```
# s3_curl GET "http://s3.example.com/?ostor-usage"
{
  "nr_items": 7,
  "truncated": false,
  "items": [
    "s3-usage-8000000000000065-2017-02-01T16:31:54.000Z-1800",
    "s3-usage-8000000000000067-2017-02-01T16:30:51.000Z-1800",
    "s3-usage-8000000000000068-2017-02-01T16:27:25.000Z-1800",
    "s3-usage-8000000000000069-2017-02-01T16:27:24.000Z-1800",
    "s3-usage-8000000000000069-2017-02-01T16:31:07.000Z-1800",
    "s3-usage-800000000000006a-2017-02-01T16:27:24.000Z-1800",
    "s3-usage-800000000000006a-2017-02-01T16:31:08.000Z-1800"
  ]
}
```

Querying statistics objects via REST API

You can display usage statistics with the `ostor-usage` service and parameter `obj` specifying the statistics object. The output includes the accessed buckets, user ID, and counters. For example:

```
# s3_curl GET "http://s3.example.com/?ostor-usage&obj=s3-usage-8000000000000065-2017-02-01T16:31:54.000Z-1800"
{
  "fmt_version": 1,
  "service_id": 8000000000000065,
  "start_ts": 1485966714,
  "period": 1390,
  "nr_items": 1,
  "items": [
    {
      "key": {
        "bucket": "client",
        "epoch": 98309,
        "user_id": "b81d6c5f895a8c86",
        "tag": ""
      },
      "counters": {
        "ops": {
          "put": 1,
          "get": 3,
          "list": 0,
          "other": 0
        },
        "net_io": {
```

```
        "uploaded": 41258,  
        "downloaded": 45511311  
      }  
    }  
  }  
]  
}
```

Deleting statistics objects via REST API

You can delete existing statistics objects with the `ostor-usage` service and parameter `obj` specifying the statistics object:

```
# s3_curl DELETE "http://s3.example.com/?ostor-usage&obj=s3-usage-8000000000000065-2017-02-01T16:31:54.000Z-1800"
```

Integration with WHMCS

This chapter explains ways to provision, enable, disable, and terminate S3 users as well as set user and bucket limits for billing purposes.

The provided examples are PHP scripts with which you can send requests to S3 cluster's REST API via cURL and OpenSSL.

Note

Replace `http://s3.example.com` in examples with your actual S3 gateway URL and `http://whmcs.example.com` with your actual WHMCS portal URL.

The screenshot shows a WHMCS Client Profile page for a client named '#4 -'. The page includes several tabs: Summary, Profile, Contacts, Products/Services, Domains, Billable Items, Invoices, Quotes, Transactions, Emails, Notes (2), and Log. The main content area is divided into several sections:

- S3 Users List:** A table with columns UserEmail and Userid. The user email is 'user@example.com' and the user id is 'ff29e878ffe8af3d'.
- S3 Information for User: ff29e878ffe8af3d:** A table with columns AWSAccessKeyId and AWSSecretAccessKey. The AWSAccessKeyId is 'ff29e878ffe8af3d3C41' and the AWSSecretAccessKey is 'KenWfnG0uUhpFajeb15CcEq7Ab9QqFDjehEbrFgatQu2YqIGpVMOMB1pFeqFG7OVG0Dnklw13v'.
- S3 Statistics List:** A table with columns Object Name and Value. The object name is 's3-usage-8000000000000017-2017-03-21T12:38:36.000Z-1800'.
- S3 Limits for User:** A table with columns Type, Name, and Value. The limits are: ops default 0.00, ops get 3600.00, ops put 0.00, ops list 0.00, ops delete 0.00, and bandwidth out 100.
- S3 Limits for Bucket: client:** A table with columns Type, Name, and Value. The limits are: ops default 0.00, ops get 3600.00, ops put 0.00, ops list 0.00, ops delete 0.00, and bandwidth out 100.
- S3 Statistics for Object: s3-usage-8000000000000017-2017-03-21T12:38:36.000Z-1800:** A table with columns fmt_version, service_id, start_ts, period, bucket, epoch, user_id, tag, put, get, list, other, uploaded, and downloaded. The data shows three rows of usage statistics.

Requirements

Any operation or management request must be authenticated with a signed request via Signature Version 2 or 4 of the Amazon S3 protocol of the corresponding S3 system user. To authenticate API requests, you need to create a system user. First, obtain the volume ID with the `ostor-ctl get-config` command. For example:

```
# ostor-ctl get-config -n 10.94.97.195
VOL_ID      TYPE      STATE
0100000000000002  OBJ      READY
...
```

Then, create a system user on any storage node in the cluster with the `ostor-s3-admin create-user -S -e <email>` command. For example:

```
# ostor-s3-admin create-user -S -e user@example.com -V 0100000000000002
UserEmail:user@example.com
UserId:a14040e0b2ef8b28
KeyPair[0]:S3AccessKeyId:a14040e0b2ef8b28FZZ8
KeyPair[0]:S3SecretAccessKey:dbwTnQTw602aAAAdq8DQVFzB6yrTCFTNiGB8C8RFA
Flags:system
```

With this user, you can now authenticate further API requests for managing the S3 cluster. You can create multiple system accounts for different types of management operations.

Configuration

In addition, you need to create Virtuozzo Hybrid Infrastructure directories to modify the default functionality.

Change to the document root directory of your WHMCS server (for example, /srv/http) and create the following directories in it:

- whmcs/includes/staas_scripts
- whmcs/admin/staas_scripts

Change to the directory whmcs/includes/staas_scripts.

The first file you need to create includes the S3 configuration. Create a configuration file S3_getConfig.php with the following contents, replacing variables as follows:

- s3_key with your S3AccessKeyId,
- s3_secret with your S3SecretAccessKey,
- s3_gateway with your configured S3 gateway address, and
- whmcs_username with your WHMCS admin username.

```
<?php

// Return array with default configuration.
if (!function_exists('S3_getConfig')) {
    function S3_getConfig() {

        // s3 login.
        $vars['s3_key'] = "939e2ac6916b57082P90";
        $vars['s3_secret'] = "tVYF3kZD9zcTt16q6QDTHaZKM2nuq4xVc18ikJpd";

        // s3 gateway.
        $vars['s3_gateway'] = "http://s3.example.com";

        // whmcs login.
        $vars['whmcs_username'] = "admin";

        // Return config array.
        return $vars;
    }
}

?>
```


Includes

Shared functions required by API operations are provided in a number of standalone PHP include files. The first file returns the client information (for example, email address) which further S3 API user management requests need for various operations. Create a file `S3_getClient.php` with the following contents:

```
<?php

// API request to get whmcs client information.
if (!function_exists('S3_getClient')) {
    function S3_getClient($userid, $whmcs_username) {

        // Get client details for user email.
        $command = 'GetClientsDetails';
        $data = array(
            'clientid' => $userid,
        );
        $results = localAPI($command, $data, $whmcs_username);

        // Return client information.
        return $results;
    }
}

?>
```

The next file adds notes to the client in WHMCS with the S3 access key pairs whenever a new user or access key pair is created. Create a file `S3_addClientNote.php` with the following contents:

```
<?php

// API request to add note to client in whmcs.
if (!function_exists('S3_addClientNote')) {
    function S3_addClientNote(
        $userid,
        $whmcs_username,
        $s3_client_userid,
        $s3_client_key,
        $s3_client_secret
    ) {

        // Add note only for non-empty users.
        if (!empty($s3_client_userid)) {

            // Add note with the s3 access key and s3 secret.
            $command = 'AddClientNote';
            $data = array(
                'userid' => $userid,
```

```

        'notes' =>
            "UserId: " . $s3_client_userid . "\n" .
            "AWSAccessKeyId: " . $s3_client_key . "\n" .
            "AWSSecretAccessKey: " . $s3_client_secret,
        );
        localAPI($command, $data, $whmcs_username);
    }
}
?>

```

The next file removes notes from the client in WHMCS with the S3 access key pairs whenever a user or access key pair is removed. Create a file `S3_delClientNote.php` with the following contents:

```

<?php

// whmcs database access.
use WHMCS\Database\Capsule;

// API request to remove note from client in whmcs.
if (!function_exists('S3_delClientNote')) {
    function S3_delClientNote(
        $userid,
        $whmcs_username,
        $s3_client_userid,
        $s3_client_key
    ) {

        // Delete notes in database.
        $db = Capsule::connection()->getPdo();
        $db->exec('
            DELETE FROM
                tblnotes
            WHERE
                userid = ' . $userid . '
            AND
                note LIKE "%' . $s3_client_userid . '%"
            AND
                note LIKE "%' . $s3_client_key . '%"
        ');
    }
}
?>

```

The last file is the cURL library for sending GET, PUT, POST, and DELETE requests. Create a file `S3_requestCur1.php` with the following contents:

```

<?php

// API request to s3 gateway.
if (!function_exists('S3_requestCurl')) {
    function S3_requestCurl($s3_key, $s3_secret, $s3_gateway, $s3_query, $method) {

        // Prepare signature.
        $s3_host = parse_url($s3_gateway, PHP_URL_HOST);
        $s3_date = date(DATE_RFC2822);

        // Generate signature.
        $s3_signature = hash_hmac('sha1', $method . "\n\n\n" . $s3_date . "\n" .
            current(explode('&', $s3_query)), $s3_secret, true);
        $s3_signature = base64_encode($s3_signature);

        // Curl init.
        $s3_curl = curl_init($s3_gateway . $s3_query);

        // Curl options.
        switch ($method) {
            case "PUT":
                curl_setopt($s3_curl, CURLOPT_PUT, 1);
                break;
            case "POST":
                curl_setopt($s3_curl, CURLOPT_POST, 1);
                break;
            case "DELETE":
                curl_setopt($s3_curl, CURLOPT_CUSTOMREQUEST, "DELETE");
                break;
        }
        curl_setopt($s3_curl, CURLOPT_RETURNTRANSFER, true);
        curl_setopt($s3_curl, CURLOPT_URL, $s3_gateway . $s3_query);
        curl_setopt($s3_curl, CURLOPT_HTTPHEADER, array(
            'Host: ' . $s3_host,
            'Date: ' . $s3_date,
            'Authorization: AWS ' . $s3_key . ':' . $s3_signature,
            'Content-Type:',
            'Expect:',
        ));

        // Call.
        $response = curl_exec($s3_curl);
        $response = json_decode($response, true);

        // Curl deinit.
        curl_close($s3_curl);

        // Return response.
        return $response;
    }
}

```

```
?>
```

Hooks

Hooks allow you to execute custom code when certain events occur in WHMCS. You will need to add S3-related action links to the admin page in WHMCS.

Change to the directory `whmcs/includes/hooks` and create a file `S3_adminAreaClientSummaryActionLinks.php` with the following contents:

```
<?php

// Modify other actions admin page.
function S3_adminAreaClientSummaryActionLinks($vars) {

    // Create additional links.
    $result[] = '<b>S3 - User Management</b>';
    $result[] = '<a href="staas_scripts/S3_createUser.php?userid=' .
        $vars['userid'] . '"> Create User</a>';
    $result[] = '<a href="staas_scripts/S3_deleteUser.php?userid=' .
        $vars['userid'] . '"> Delete User</a>';
    $result[] = '<a href="staas_scripts/S3_enableUser.php?userid=' .
        $vars['userid'] . '"> Enable User</a>';
    $result[] = '<a href="staas_scripts/S3_disableUser.php?userid=' .
        $vars['userid'] . '"> Disable User</a>';
    $result[] = '<a href="staas_scripts/S3_generateAccessKey.php?userid=' .
        $vars['userid'] . '"> Generate Access
Key</a>';
    $result[] = '<a href="staas_scripts/S3_revokeAccessKey.php?userid=' .
        $vars['userid'] . '"> Revoke Access
Key</a>';
    $result[] = '<a href="staas_scripts/S3_queryUser.php?userid=' .
        $vars['userid'] . '"> Query User
(on/off)</a>';
    $result[] = '<a href="staas_scripts/S3_listUsers.php">
         List Users
(on/off)</a>';
    $result[] = '&nbsp;';
    $result[] = '<b>S3 - User Limits Management</b>';
    $result[] = '
        <form>
            <input name="userid" type="hidden" value="' . $vars['userid'] . '">
```

```

<input name="ops-value" size="4">
<select name="ops-name">
  <option>default</option>
  <option>get</option>
  <option>put</option>
  <option>list</option>
  <option>delete</option>
</select> ops/s
<br />
<input name="bandwidth-value" size="4">
<select name="bandwidth-name">
  <option>out</option>
</select> bandwidth/s
<br />
<button type="submit"
  formaction="staas_scripts/S3_setLimitsForUser.php">Set</button>
<button type="submit"
  formaction="staas_scripts/S3_getLimitsForUser.php">Get</button>
<button type="submit"
  formaction="staas_scripts/S3_deleteLimitsForUser.php">Delete</button>
</form>
';
$result[] = '&nbsp;';
$result[] = '<b>S3 - Bucket Limits Management</b>';
$result[] = '
  <form>
    <input name="userid" type="hidden" value="' . $vars['userid'] . '">
    <input name="ops-value" size="4">
    <select name="ops-name">
      <option>default</option>
      <option>get</option>
      <option>put</option>
      <option>list</option>
      <option>delete</option>
    </select> ops/s
    <br />
    <input name="bandwidth-value" size="4">
    <select name="bandwidth-name">
      <option>out</option>
    </select> bandwidth/s
    <br />
    <input name="bucket" size="4"> bucket name
    <br />
    <button type="submit"
      formaction="staas_scripts/S3_setLimitsForBucket.php">Set</button>
    <button type="submit"
      formaction="staas_scripts/S3_getLimitsForBucket.php">Get</button>
    <button type="submit"
      formaction="staas_scripts/S3_deleteLimitsForBucket.php">Delete</button>
  </form>
';
$result[] = '&nbsp;';

```

```

$result[] = '<b>S3 - Usage Statistics</b>';
$result[] = '
    <a href="staas_scripts/S3_listStatsObjects.php">
        
            List Statistics Objects (on/off)
    </a>
    <p>
        <form>
            <input name="object" size="15"> object name
            <br />
            <button type="submit"
                formaction="staas_scripts/S3_getStatsForObject.php">Get</button>
            <button type="submit"
                formaction="staas_scripts/S3_
deleteStatsForObject.php">Delete</button>
            </form>
        </p>
    ';
$result[] = '&nbsp;';

// Return links.
return $result;
}

// Modify admin area.
add_hook('AdminAreaClientSummaryActionLinks', 1, "S3_
adminAreaClientSummaryActionLinks");
?>

```

The last file extends the admin summary page and displays S3 user information as well as user and bucket limits if the corresponding links are clicked. Create a file `S3_adminAreaClientSummaryPage.php` with the following contents:

```

<?php

// Modify admin client summary to show S3 information.
function S3_adminAreaClientSummaryPage($vars) {

    // Sane default.
    $result = '
    <div class="row client-summary-panels">
    ';

    // Show users.
    if ($_SESSION['s3_list_users'] == 1) {

        // Table header.
        $result = $result . '
        <div class="col-lg-6 col-sm-12">
            <div class="clientssummarybox">

```

```

        <div class="title">
            S3 Users List
        </div>
        <table class="clientssummarystats" cellspacing="0" cellpadding="2">
            <tr>
                <td><b>UserId</b></td>
                <td><b>UserEmail</b></td>
            </tr>
        </table>
';

// One row per access key pair.
foreach ($_SESSION['s3_list'] as $s3_row) {
    $result = $result . '
        <tr class="altrow">
            <td>' . $s3_row['UserId'] . '</td>
            <td>' . $s3_row['UserEmail'] . '</td>
        </tr>
    ';
}

// Table footer.
$result = $result . '
    </table>
</div>
</div>
';
}

// Show user.
if ($_SESSION['s3_query_user'] == 1) {

    // Table header.
    $result = $result . '
    <div class="col-lg-6 col-sm-12">
        <div class="clientssummarybox">
            <div class="title">
                S3 Information for User: ' . $_SESSION['s3_userid'] . '
            </div>
            <table class="clientssummarystats" cellspacing="0" cellpadding="2">
                <tr>
                    <td><b>AWSAccessKeyId</b></td>
                    <td><b>AWSSecretAccessKey</b></td>
                </tr>
            </table>
        </div>
    ';

    // One row per access key pair.
    foreach ($_SESSION['s3_aws_access_keys'] as $s3_row) {
        $result = $result . '
            <tr class="altrow">
                <td>' . $s3_row['AWSAccessKeyId'] . '</td>
                <td>' . $s3_row['AWSSecretAccessKey'] . '</td>
            </tr>
        ';
    }
}

```

```

    };
}

// Table footer.
$result = $result . '
    </table>
</div>
</div>
';
}

// Table footer and next header.
$result = $result . '
</div>
<div class="row client-summary-panels">
';

// Show statistics list.
if ($_SESSION['s3_stat_objects'] == 1) {

    // Table header.
    $result = $result . '
<div class="col-lg-6 col-sm-12">
    <div class="clientsummarybox">
        <div class="title">
            S3 Statistics List
        </div>
        <table class="clientsummarystats" cellspacing="0" cellpadding="2">
            <tr>
                <td><b>Object Name</b></td>
            </tr>
';

    // One row per access key pair.
    foreach ($_SESSION['s3_stat']['items'] as $s3_object) {
        $result = $result . '
            <tr class="altrow">
                <td>' . $s3_object . '</td>
            </tr>
';
    }

    // Table footer.
    $result = $result . '
        </table>
    </div>
</div>
';
}

// Show limits for user.
if (!empty($_SESSION['s3_limits_user'])) {

```



```

// Table header.
$result = $result . '
<div class="col-lg-3 col-sm-6">
  <div class="clientssummarybox">
    <div class="title">
      S3 Limits for User
    </div>
    <table class="clientssummarystats" cellspacing="0" cellpadding="2">
      <tr>
        <td><b>Type</b></td>
        <td><b>Name</b></td>
        <td><b>Value</b></td>
      </tr>
    </table>
  </div>
';

// One row per access key pair.
foreach ($_SESSION['s3_limits_user'] as $s3_limits => $s3_value) {
  list($s3_type, $s3_limit) = explode(":", $s3_limits);
  $result = $result . '
    <tr class="altrow">
      <td>' . $s3_type . '</td>
      <td>' . $s3_limit . '</td>
      <td>' . $s3_value . '</td>
    </tr>
  ';
}

// Table footer.
$result = $result . '
  </table>
</div>
</div>
';
}

// Show limits for bucket.
if (!empty($_SESSION['s3_limits_bucket'])) {

  // Table header.
  $result = $result . '
  <div class="col-lg-3 col-sm-6">
    <div class="clientssummarybox">
      <div class="title">
        S3 Limits for Bucket: ' . $_SESSION['s3_bucket'] . '
      </div>
      <table class="clientssummarystats" cellspacing="0" cellpadding="2">
        <tr>
          <td><b>Type</b></td>
          <td><b>Name</b></td>
          <td><b>Value</b></td>
        </tr>
      </table>
    </div>
  </div>
  ';
}

```

```

';

// One row per access key pair.
foreach ($_SESSION['s3_limits_bucket'] as $s3_limits => $s3_value) {
    list($s3_type, $s3_limit) = explode(":", $s3_limits);
    $result = $result . '
        <tr class="altrow">
            <td>' . $s3_type . '</td>
            <td>' . $s3_limit . '</td>
            <td>' . $s3_value . '</td>
        </tr>
    ';
}

// Table footer.
$result = $result . '
    </table>
</div>
</div>
';
}

// Table footer and next header.
$result = $result . '
</div>
<div class="row client-summary-panels">
';

// Show statistics for object.
if (!empty($_SESSION['s3_object_statistic'])) {

    // Table header.
    $result = $result . '
<div class="col-lg-12 col-sm-24">
    <div class="clientsummarybox">
        <div class="title">
            S3 Statistics for Object: ' . $_SESSION['s3_object'] . '
        </div>
        <table class="clientsummarystats" cellspacing="0" cellpadding="2">
            <tr>
                <td><b>fmt_version</b></td>
                <td><b>service_id</b></td>
                <td><b>start_ts</b></td>
                <td><b>period</b></td>
                <td><b>bucket</b></td>
                <td><b>epoch</b></td>
                <td><b>user_id</b></td>
                <td><b>tag</b></td>
                <td><b>put</b></td>
                <td><b>get</b></td>
                <td><b>list</b></td>
                <td><b>other</b></td>
            </tr>
        </table>
    </div>
';
}

```

```

        <td><b>uploaded</b></td>
        <td><b>downloaded</b></td>
    </tr>
';

// One row per access key pair.
foreach ($_SESSION['s3_object_statistic']['items'] as $s3_object) {
    $result = $result . '
        <tr class="altrow">
            <td>' . $_SESSION['s3_object_statistic']['fmt_version'] . '</td>
            <td>' . $_SESSION['s3_object_statistic']['service_id'] . '</td>
            <td>' . $_SESSION['s3_object_statistic']['start_ts'] . '</td>
            <td>' . $_SESSION['s3_object_statistic']['period'] . '</td>
            <td>' . $s3_object['key']['bucket'] . '</td>
            <td>' . $s3_object['key']['epoch'] . '</td>
            <td>' . $s3_object['key']['user'] . '</td>
            <td>' . $s3_object['key']['tag'] . '</td>
            <td>' . $s3_object['counters']['ops']['put'] . '</td>
            <td>' . $s3_object['counters']['ops']['get'] . '</td>
            <td>' . $s3_object['counters']['ops']['list'] . '</td>
            <td>' . $s3_object['counters']['ops']['other'] . '</td>
            <td>' . $s3_object['counters']['net_io']['uploaded'] . '</td>
            <td>' . $s3_object['counters']['net_io']['downloaded'] . '</td>
        </tr>
    ';
}

// Table footer.
$result = $result . '
        </table>
    </div>
</div>
';
}

// Table footer.
$result = $result . '
</div>
';

// Return table.
return $result;
}

// Modify admin area.
add_hook('AdminAreaClientSummaryPage', 1, "S3_adminAreaClientSummaryPage");
?>

```

Statistics

You need to have statistics collection enabled on your S3 gateway. The S3 gateway will save the statistics as regular storage objects. On each S3 storage node, create a file `/var/lib/ostor/local/gw.conf` with the following contents:

```
# Enable usage statistics collection.  
S3_GW_COLLECT_STAT=1
```

Restart the S3 storage service to apply the configuration changes. Run the following command on all S3 storage nodes:

```
# systemctl restart ostor-agentd.service
```

Now you can login to WHMCS. Additional links and S3 management options will be shown in the **Client Profile** section.

The screenshot displays the WHMCS Client Profile interface for client #4. The page is organized into several sections:

- Clients Information:** Fields for First Name, Last Name, Company Name, Email Address, Address 1, Address 2, City, State/Region, Postcode, Country, and Phone Number.
- Invoices/Billing:** Financial summary including Paid, Draft, Unpaid/Due, Cancelled, Refunded, Collections, Income, and Credit Balance. It also provides actions like 'Create Invoice', 'Generate Due Invoices', 'Add Billable Item', 'Manage Credits', and 'Create New Quote'.
- Products/Services:** Usage statistics for Shared Hosting, Reseller Hosting, VPS/Server, Product/Service, Domains, Accepted Quotes, Support Tickets, and Affiliate Signups. It includes actions like 'View Orders' and 'Add New Order'.
- Other Actions:** A collection of S3 management options, including 'S3 - User Management' (Create User, Delete User, Enable User, Disable User, Generate Access Key, Revoke Access Key, Query User, List Users) and 'S3 - User Limits Management' (Set, Get, Delete).

Managing S3 users in WHMCS

This section describes how to manage users in WHMCS in a service provider scenario. New customers will sign up for the service during purchase in your online store and you will need to create users for them in the S3 cluster.

Create all files mentioned further in the directory `whmcs/admin/staas_scripts`.

Creating S3 users in WHMCS

You can create a user with the `ostor-users` service and parameter `emailAddress` specifying the user email address. WHMCS creates the user in S3 cluster when you click **Create User**. Create a file `s3_createUser.php` with the following contents:

```

<?php

// Load configuration and libraries.
require('../../includes/staas_scripts/S3_addClientNote.php');
require('../../includes/staas_scripts/S3_getClient.php');
require('../../includes/staas_scripts/S3_getConfig.php');
require('../../includes/staas_scripts/S3_requestCurl.php');
require('../../init.php');

// Create s3 user.
function S3_createUser($userid) {

    // Load configuration.
    $s3_config = s3_getConfig();

    // Get whmcs user email.
    $s3_whmcs = S3_getClient($userid, $s3_config['whmcs_username']);

    // Create s3 user.
    $s3_client = S3_requestCurl(
        $s3_config['s3_key'],
        $s3_config['s3_secret'],
        $s3_config['s3_gateway'],
        "?ostor-users&emailAddress=" . $s3_whmcs['email'],
        "PUT"
    );


    // Add note with the s3 access key and s3 secret.
    S3_addClientNote(
        $s3_whmcs['userid'],
        $s3_config['whmcs_username'],
        $s3_client['UserId'],
        $s3_client['AWSAccessKeys']['0']['AWSAccessKeyId'],
        $s3_client['AWSAccessKeys']['0']['AWSSecretAccessKey']
    );

    // Redirect back.
    header('Location: ' . $_SERVER['HTTP_REFERER']);
}

// Call function.
S3_createUser($_GET['userid']);

?>

```

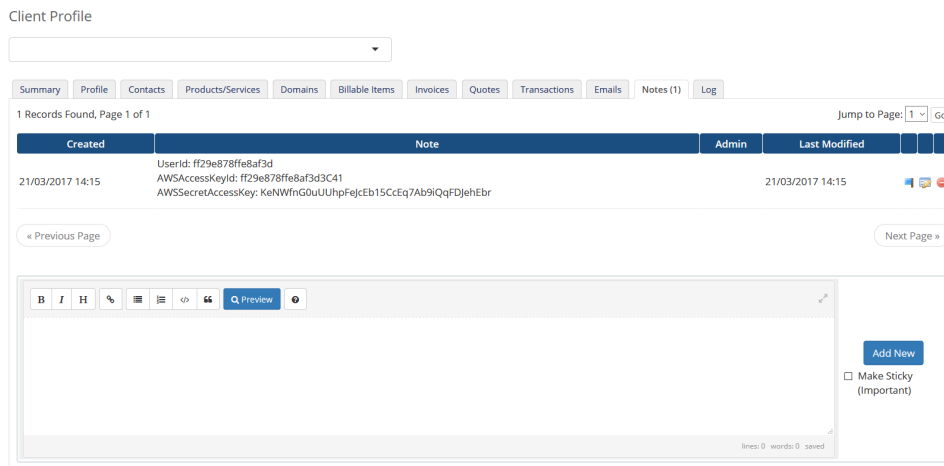

Listing S3 users in WHMCS

You can list information about all users with the `ostor-users` service. Additional rows may list S3 access key pairs associated with the user. WHMCS lists the users information fetched from S3 cluster when you click **List Users (on/off)**. Create a file `S3_listUsers.php` with the following contents:

```
<?php

// Load configuration and libraries.
require('../../includes/staas_scripts/S3_getConfig.php');
require('../../includes/staas_scripts/S3_requestCurl.php');
require('../../init.php');

// List s3 users.
function S3_listUsers() {

    // Hide now.
    if ($_SESSION['s3_list_users'] == 1) {

        // Hide.
        $_SESSION['s3_list_users'] = 0;

        // Redirect back.
        header('Location: ' . $_SERVER['HTTP_REFERER']);

        // Return immediately.
        return;
    }

    // Load configuration.
    $s3_config = s3_getConfig();

    // Get s3 users.
    $s3_client = S3_requestCurl(
        $s3_config['s3_key'],
```

```

        $$s3_config['s3_secret'],
        $$s3_config['s3_gateway'],
        "?ostor-users",
        "GET"
    );

    // Store s3 result.
    $_SESSION['s3_list_users'] = 1;
    $_SESSION['s3_list'] = $s3_client;

    // Redirect back.
    header('Location: ' . $_SERVER['HTTP_REFERER']);
}

// Call function.
S3_listUsers();

?>

```

Client Profile

Summary Profile Contacts Products/Services Domains Billable Items Invoices Quotes Transactions Emails Notes (2) Log

#4 - Exempt from Tax: **No** Auto CC Processing: **Yes** Send Overdue Reminders: **Yes** Apply Late Fees: **Yes**

S3 Users List

Userid	UserEmail
939c2ac6916b5708	user@example.com
ff29e878ff6af3d	client@example.com

Clients Information

First Name
Last Name
Company Name
Email Address: client@example.com
Address 1: Landsberger Straße 110
City: Munich
State/Region: Bayern
Postcode: 80339
Country: DE - Germany
Phone Number: +498961372840

[Reset & Send Password](#)
[Credit Card Information](#)

Invoices/Billing

Paid	0 (€0.00 EUR)
Draft	0 (€0.00 EUR)
Unpaid/Due	0 (€0.00 EUR)
Cancelled	0 (€0.00 EUR)
Refunded	0 (€0.00 EUR)
Collections	0 (€0.00 EUR)
Income	€0.00 EUR
Credit Balance	€0.00 EUR

[Create Invoice](#)
[Create Add Funds Invoice](#)
[Generate Due Invoices](#)
[Add Billable Item](#)
[Manage Credits](#)

Products/Services

Shared Hosting	0 (0 Total)
Reseller Hosting	0 (0 Total)
VPS/Server	0 (0 Total)
Product/Service	0 (0 Total)
Domains	0 (0 Total)
Accepted Quotes	0 (0 Total)
Support Tickets	0 (0 Total)
Affiliate Signups	0

[View Orders](#)
[Add New Order](#)

Files

Other Actions

S3 - User Management

- [Create User](#)
- [Delete User](#)
- [Enable User](#)
- [Disable User](#)
- [Generate Access Key](#)
- [Revoke Access Key](#)
- [Query User \(on/off\)](#)
- [List Users \(on/off\)](#)

S3 - User Limits Management

default ops/s

Querying S3 users in WHMCS

You can display information and status of a user with the `ostor-users` service and parameter `emailAddress` specifying the user email address. WHMCS displays the user information fetched from S3 cluster when you click **Query User (on/off)**. Create a file `S3_queryUser.php` with the following contents:

```

<?php

// Load configuration and libraries.
require('../../includes/taas_scripts/S3_getClient.php');
require('../../includes/taas_scripts/S3_getConfig.php');
require('../../includes/taas_scripts/S3_requestCurl.php');
require('../../init.php');

// Query s3 user.

```

```

function S3_queryUser($userid) {

    // Hide now.
    if ($_SESSION['s3_query_user'] == 1) {

        // Hide.
        $_SESSION['s3_query_user'] = 0;

        // Redirect back.
        header('Location: ' . $_SERVER['HTTP_REFERER']);

        // Return immediately.
        return;
    }

    // Load configuration.
    $s3_config = s3_getConfig();

    // Get whmcs user email.
    $s3_whmcs = S3_getClient($userid, $s3_config['whmcs_username']);

    // Get s3 user id.
    $s3_client = S3_requestCurl(
        $s3_config['s3_key'],
        $s3_config['s3_secret'],
        $s3_config['s3_gateway'],
        "?ostor-users&emailAddress=" . $s3_whmcs['email'],
        "GET"
    );

    // Store s3 result.
    $_SESSION['s3_query_user'] = 1;
    $_SESSION['s3_userid'] = $s3_client['UserId'];
    $_SESSION['s3_aws_access_keys'] = $s3_client['AWSAccessKeys'];

    // Redirect back.
    header('Location: ' . $_SERVER['HTTP_REFERER']);
}

// Call function.
S3_queryUser($_GET['userid']);

?>

```


Client Profile

#4 - Exempt from Tax: **No** Auto CC Processing: **Yes** Send Overdue Reminders: **Yes** Apply Late Fees: **Yes**

S3 Information for User: ff29e878fe8af3d

AWSAccessKeyId	AWSecretAccessKey
ff29e878fe8af3d3c41	xxkxWfms0uJngPgeEbt15CcEq7Ab9CqF5jehEbr
ff29e878fe8af3d3c7X	FqkQu2ZtqGplVMOMB1pFegFG7OVGDnk1kw13v

Clients Information	Invoices/Billing	Products/Services	Other Actions
First Name Last Name Company Name Email Address: client@example.com Address 1: Landsberger Straße 110 City: Munich State/Region: Bayern Postcode: 80339 Country: DE - Germany Phone Number: +498961372840 Reset & Send Password Credit Card Information	Paid: 0 (€0.00 EUR) Draft: 0 (€0.00 EUR) Unpaid/Due: 0 (€0.00 EUR) Cancelled: 0 (€0.00 EUR) Refunded: 0 (€0.00 EUR) Collections: 0 (€0.00 EUR) Income: €0.00 EUR Credit Balance: €0.00 EUR Create Invoice Create Add Funds Invoice Generate Due Invoices Add Billable Item Manage Credits	Shared Hosting: 0 (0 Total) Reseller Hosting: 0 (0 Total) VPS/Server: 0 (0 Total) Product/Service: 0 (0 Total) Domains: 0 (0 Total) Accepted Quotes: 0 (0 Total) Support Tickets: 0 (0 Total) Affiliate Signups: 0 View Orders Add New Order	S3 - User Management Create User Delete User Enable User Disable User Generate Access Key Revoke Access Key Query User (on/off) List Users (on/off) S3 - User Limits Management <input type="text" value="default"/> ops/s

Disabling S3 users in WHMCS

You can disable users with the `ostor-users` service and parameter `emailAddress` specifying the user email address. WHMCS disables read and write access to S3 cluster when you click **Disable User**. Create a file `S3_disableUser.php` with the following contents:

```
<?php

// Load configuration and libraries.
require('../../includes/staas_scripts/S3_getClient.php');
require('../../includes/staas_scripts/S3_getConfig.php');
require('../../includes/staas_scripts/S3_requestCurl.php');
require('../../init.php');

// Disable user.
function S3_disableUser($userid) {

    // Load configuration.
    $s3_config = s3_getConfig();

    // Get whmcs user email.
    $s3_whmcs = S3_getClient($userid, $s3_config['whmcs_username']);

    // Disable user.
    $s3_client = S3_requestCurl(
        $s3_config['s3_key'],
        $s3_config['s3_secret'],
        $s3_config['s3_gateway'],
        "?ostor-users&emailAddress=" . $s3_whmcs['email'] . "&disable",
        "POST"
    );

    // Redirect back.
    header('Location: ' . $_SERVER['HTTP_REFERER']);
}
```

```
// Call function.
S3_disableUser($_GET['userid']);

?>
```

Enabling S3 users in WHMCS

You can enable a previously disabled user with the `ostor-users` service and parameter `emailAddress` specifying the user email address. WHMCS enables read and write access to S3 cluster for user when you click **Enable User**. Create a file `S3_enableUser.php` with the following contents:

```
<?php

// Load configuration and libraries.
require('../../includes/staas_scripts/S3_getClient.php');
require('../../includes/staas_scripts/S3_getConfig.php');
require('../../includes/staas_scripts/S3_requestCurl.php');
require('../../init.php');

// Enable user.
function S3_enableUser($userid) {

    // Load configuration.
    $s3_config = s3_getConfig();

    // Get whmcs user email.
    $s3_whmcs = S3_getClient($userid, $s3_config['whmcs_username']);

    // Enable user.
    $s3_client = S3_requestCurl(
        $s3_config['s3_key'],
        $s3_config['s3_secret'],
        $s3_config['s3_gateway'],
        "?ostor-users&emailAddress=" . $s3_whmcs['email'] . "&enable",
        "POST"
    );

    // Redirect back.
    header('Location: ' . $_SERVER['HTTP_REFERER']);
}

// Call function.
S3_enableUser($_GET['userid']);

?>
```

Deleting S3 users in WHMCS

You can delete users with the `ostor-users` service and parameter `emailAddress` specifying the user email address. WHMCS removes the user from S3 cluster when you click **Delete User**. Create a file

S3_deleteUser.php with the following contents:

```
<?php

// Load configuration and libraries.
require('../../includes/taas_scripts/S3_delClientNote.php');
require('../../includes/taas_scripts/S3_getClient.php');
require('../../includes/taas_scripts/S3_getConfig.php');
require('../../includes/taas_scripts/S3_requestCurl.php');
require('../../init.php');

// Delete s3 user.
function S3_deleteUser($userid) {

    // Load configuration.
    $s3_config = s3_getConfig();

    // Get whmcs user email.
    $s3_whmcs = S3_getClient($userid, $s3_config['whmcs_username']);

    // Get s3 user id.
    $s3_client = S3_requestCurl(
        $s3_config['s3_key'],
        $s3_config['s3_secret'],
        $s3_config['s3_gateway'],
        "?ostor-users&emailAddress=" . $s3_whmcs['email'],
        "GET"
    );

    // Delete s3 user.
    S3_requestCurl(
        $s3_config['s3_key'],
        $s3_config['s3_secret'],
        $s3_config['s3_gateway'],
        "?ostor-users&emailAddress=" . $s3_whmcs['email'],
        "DELETE"
    );

    // Delete note with the s3 access key and s3 secret.
    S3_delClientNote(
        $s3_whmcs['userid'],
        $s3_config['whmcs_username'],
        $s3_client['UserId'],
        ""
    );

    // Redirect back.
    header('Location: ' . $_SERVER['HTTP_REFERER']);
}

// Call function.
S3_deleteUser($_GET['userid']);
```

?>

Generating S3 access keys in WHMCS

You can generate a new or additional access key pair with the `ostor-users` service and the following parameters: `emailAddress` specifying the user email address, `genKey`. WHMCS generates a new key pair when you click **Generate Access Key**. Create a file `S3_generateAccessKey.php` with the following contents:

```
<?php

// Load configuration and libraries.
require('../../includes/staas_scripts/S3_addClientNote.php');
require('../../includes/staas_scripts/S3_getClient.php');
require('../../includes/staas_scripts/S3_getConfig.php');
require('../../includes/staas_scripts/S3_requestCurl.php');
require('../../init.php');

// Generate s3 access key pair.
function S3_generateAccessKey($userid) {

    // Load configuration.
    $s3_config = s3_getConfig();

    // Get whmcs user email.
    $s3_whmcs = S3_getClient($userid, $s3_config['whmcs_username']);

    // Generate s3 key pair.
    $s3_client = S3_requestCurl(
        $s3_config['s3_key'],
        $s3_config['s3_secret'],
        $s3_config['s3_gateway'],
        "?ostor-users&emailAddress=" . $s3_whmcs['email'] . "&genKey",
        "POST"
    );

    // Add note with the s3 access key and s3 secret.
    S3_addClientNote(
        $s3_whmcs['userid'],
        $s3_config['whmcs_username'],
        $s3_client['UserId'],
        $s3_client['AWSAccessKeys']['0']['AWSAccessKeyId'],
        $s3_client['AWSAccessKeys']['0']['AWSSecretAccessKey']
    );

    // Redirect back.
    header('Location: ' . $_SERVER['HTTP_REFERER']);
}
```

```
// Call function.
S3_generateAccessKey($_GET['userid']);

?>
```

Client Profile

Summary Profile Contacts Products/Services Domains Billable Items Invoices Quotes Transactions Emails Notes (2) Log

2 Records Found, Page 1 of 1

Created	Note	Admin	Last Modified
21/03/2017 14:17	Userid: ff29e878ffe8af3d AWSAccessKeyId: ff29e878ffe8af3dCZ7X AWSSecretAccessKey: FqatQu22YqIqplVMOMB1pFqeqFG7OVG0Dnklww13v		21/03/2017 14:17
21/03/2017 14:15	Userid: ff29e878ffe8af3d AWSAccessKeyId: ff29e878ffe8af3d3C41 AWSSecretAccessKey: KeNWfnG0uUUhpfEjEb15CcEq7Ab9lQqFDJehEbr		21/03/2017 14:15

« Previous Page

Next Page »

B I H % Q Preview

Add New

Make Sticky (Important)

Revoking S3 access keys in WHMCS

You can revoke the specified access key pair of the specified user with the `ostor-users` service and the following parameters: `emailAddress` specifying the user email address, `revokeKey` specifying the access key in the key pair. WHMCS removes the key pair when you click **Revoke Access Key**. Create a file `S3_revokeAccessKey.php` with the following contents:

```
<?php

// Load configuration and libraries.
require('../../includes/staas_scripts/S3_delClientNote.php');
require('../../includes/staas_scripts/S3_getClient.php');
require('../../includes/staas_scripts/S3_getConfig.php');
require('../../includes/staas_scripts/S3_requestCurl.php');
require('../../init.php');

// Revoke s3 access key pair.
function S3_revokeAccessKey($userid) {

    // Load configuration.
    $s3_config = s3_getConfig();

    // Get whmcs user email.
    $s3_whmcs = S3_getClient($userid, $s3_config['whmcs_username']);

    // Get first s3 access key.
    $s3_client = S3_requestCurl(
        $s3_config['s3_key'],
        $s3_config['s3_secret'],
        $s3_config['s3_gateway'],
```

```

        "?ostor-users&emailAddress=" . $s3_whmcs['email'],
        "GET"
    );

    // Revoke s3 access key.
    S3_requestCurl(
        $s3_config['s3_key'],
        $s3_config['s3_secret'],
        $s3_config['s3_gateway'],
        "?ostor-users&emailAddress=" . $s3_whmcs['email'] .
        "&revokeKey=" . $s3_client['AWSAccessKeys']['0']['AWSAccessKeyId'],
        "POST"
    );

    // Delete note with the s3 access key and s3 secret.
    S3_delClientNote(
        $s3_whmcs['userid'],
        $s3_config['whmcs_username'],
        $s3_client['UserId'],
        $s3_client['AWSAccessKeys']['0']['AWSAccessKeyId']
    );

    // Redirect back.
    header('Location: ' . $_SERVER['HTTP_REFERER']);
}

// Call function.
S3_revokeAccessKey($_GET['userid']);

?>

```

Managing S3 user and bucket limits in WHMCS

This section describes limits you can define for users and buckets in WHMCS. You can apply the limits according to specific options that can be a part of your service plan.

Setting user limits in WHMCS

You can limit operations rate with the `ostor-limits` service and the following parameters: `emailAddress` specifying the email address, `default=`, `get=`, `put=`, `list=`, or `delete=` specifying the limit value.

Similarly, you can limit outgoing bandwidth of a response with the following parameters: `emailAddress` specifying the email address, `out=` specifying the limit value. WHMCS configures user limits in an S3 cluster when you click the **Set** button. Create a file `S3_setLimitsForUser.php` with the following contents:

```
<?php
```

```

// Load configuration and libraries.
require('../../includes/taas_scripts/S3_getClient.php');
require('../../includes/taas_scripts/S3_getConfig.php');
require('../../includes/taas_scripts/S3_requestCurl.php');
require('../../init.php');

// Set s3 user limits.
function S3_setLimitsForUser($vars) {

    // Load configuration.
    $s3_config = s3_getConfig();

    // Get whmcs user email.
    $s3_whmcs = S3_getClient($vars['userid'], $s3_config['whmcs_username']);

    // Set only if value specified.
    if (!empty($vars['ops-value'])) {

        // Set s3 bucket limits (ops).
        S3_requestCurl(
            $s3_config['s3_key'],
            $s3_config['s3_secret'],
            $s3_config['s3_gateway'],
            "?ostor-limits&emailAddress=" . $s3_whmcs['email'] .
            "&limit-type=ops&limit-resource=" . $vars['ops-name'] .
            '&limit-value=' . $vars['ops-value'],
            "PUT"
        );
    }

    // Set only if value specified.
    if (!empty($vars['bandwidth-value'])) {

        // Set s3 bucket limits (bandwidth).
        S3_requestCurl(
            $s3_config['s3_key'],
            $s3_config['s3_secret'],
            $s3_config['s3_gateway'],
            "?ostor-limits&emailAddress=" . $s3_whmcs['email'] .
            "&limit-type=bandwidth&limit-resource=" . $vars['bandwidth-name'] .
            '&limit-value=' . $vars['bandwidth-value'],
            "PUT"
        );
    }

    // Redirect back.
    header('Location: ' . $_SERVER['HTTP_REFERER']);
}

// Call function.
S3_setLimitsForUser($_GET);

```

?>

Client Profile

Summary Profile Contacts Products/Services Domains Billable Items Invoices Quotes Transactions Emails Notes (2) Log

#4 - Exempt from Tax: **No** Auto CC Processing: **Yes** Send Overdue Reminders: **Yes** Apply Late Fees: **Yes**

S3 Limits for User

Type	Name	Value
ops	default	0.00
ops	get	3600.00
ops	put	0.00
ops	list	0.00
ops	delete	0.00
bandwidth	out	100

Clients Information

First Name	
Last Name	
Company Name	
Email Address	client@example.com
Address 1	Landsberger Strasse 110
Address 2	
City	Munich
State/Region	Bayern
Postcode	80339
Country	DE - Germany

Invoices/Billing

Paid	0 (€0.00 EUR)
Draft	0 (€0.00 EUR)
Unpaid/Due	0 (€0.00 EUR)
Cancelled	0 (€0.00 EUR)
Refunded	0 (€0.00 EUR)
Collections	0 (€0.00 EUR)
Income	€0.00 EUR
Credit Balance	€0.00 EUR

Products/Services

Shared Hosting	0 (0 Total)
Reseller Hosting	0 (0 Total)
VPS/Server	0 (0 Total)
Product/Service	0 (0 Total)
Domains	0 (0 Total)
Accepted Quotes	0 (0 Total)
Support Tickets	0 (0 Total)
Affiliate Signups	0

Other Actions

S3 - User Management

- Create User
- Delete User
- Enable User
- Disable User
- Generate Access Key
- Revoke Access Key
- Query User (on/off)
- List Users (on/off)

Querying user limits in WHMCS

You can display the current limits with the `ostor-limits` service and parameter `emailAddress` specifying the email address. WHMCS displays the user limits in S3 cluster when you click the **Get** button. Create a file `S3_getLimitsForUser.php` with the following contents:

```
<?php

// Load configuration and libraries.
require('../includes/staas_scripts/S3_getClient.php');
require('../includes/staas_scripts/S3_getConfig.php');
require('../includes/staas_scripts/S3_requestCurl.php');
require('../init.php');

// Get s3 user limits.
function S3_getLimitsForUser($userid) {

    // Load configuration.
    $s3_config = s3_getConfig();

    // Get whmcs user email.
    $s3_whmcs = S3_getClient($userid, $s3_config['whmcs_username']);

    // Get s3 user limits.
    $s3_client = S3_requestCurl(
        $s3_config['s3_key'],
        $s3_config['s3_secret'],
        $s3_config['s3_gateway'],
        "?ostor-limits&emailAddress=" . $s3_whmcs['email'],
        "GET"
    );

    // Store s3 result.
```



```

    $_SESSION['s3_limits_user'] = $s3_client;

    // Redirect back.
    header('Location: ' . $_SERVER['HTTP_REFERER']);
}

// Call function.
S3_getLimitsForUser($_GET['userid']);

?>

```

Deleting user limits in WHMCS

You can delete the current limits with the `ostor-limits` service and parameter `emailAddress` specifying the email address. WHMCS removes the user limits from S3 cluster when you click the **Delete** button. Create a file `S3_deleteLimitsForUser.php` with the following contents:

```

<?php

// Load configuration and libraries.
require('../../includes/staas_scripts/S3_getClient.php');
require('../../includes/staas_scripts/S3_getConfig.php');
require('../../includes/staas_scripts/S3_requestCurl.php');
require('../../init.php');

// Delete s3 user limits.
function S3_getLimitsForUser($userid) {

    // Load configuration.
    $s3_config = s3_getConfig();

    // Get whmcs user email.
    $s3_whmcs = S3_getClient($userid, $s3_config['whmcs_username']);

    // Delete s3 user limits.
    S3_requestCurl(
        $s3_config['s3_key'],
        $s3_config['s3_secret'],
        $s3_config['s3_gateway'],
        "?ostor-limits&emailAddress=" . $s3_whmcs['email'],
        "DELETE"
    );

    // Clear array.
    $_SESSION['s3_limits_user'] = null;

    // Redirect back.
    header('Location: ' . $_SERVER['HTTP_REFERER']);
}

```

```
// Call function.
S3_getLimitsForUser($_GET['userid']);

?>
```

Setting buckets limits in WHMCS

You can limit operations rate with the `ostor-limits` service and the following parameters: `bucket` specifying the bucket name, `default=`, `get=`, `put=`, `list=`, `delete=` specifying the limit value.

Similarly, you can limit outgoing bandwidth of a response with the `ostor-limits` service and the following parameters: `bucket` specifying the bucket name, `out=` specifying the limit value. WHMCS configures the bucket limits in S3 cluster when you click the **Set** button. Create a file `S3_setLimitsForBucket.php` with the following contents:

```
<?php

// Load configuration and libraries.
require('../../includes/staas_scripts/S3_getConfig.php');
require('../../includes/staas_scripts/S3_requestCurl.php');
require('../../init.php');

// Set s3 bucket limits.
function S3_setLimitsForBucket($vars) {

    // Load configuration.
    $s3_config = s3_getConfig();

    // Set only if value specified.
    if (!empty($vars['ops-value'])) {

        // Set s3 bucket limits (ops).
        S3_requestCurl(
            $s3_config['s3_key'],
            $s3_config['s3_secret'],
            $s3_config['s3_gateway'],
            "?ostor-limits&bucket=" . $vars['bucket'] .
            "&limit-type=ops&limit-resource=" . $vars['ops-name'] .
            '&limit-value=' . $vars['ops-value'],
            "PUT"
        );
    }

    // Set only if value specified.
    if (!empty($vars['bandwidth-value'])) {

        // Set s3 bucket limits (bandwidth).
        S3_requestCurl(
            $s3_config['s3_key'],
            $s3_config['s3_secret'],
```

```

        $s3_config['s3_gateway'],
        "?ostor-limits&bucket=" . $vars['bucket'] .
        "&limit-type=bandwidth&limit-resource=" . $vars['bandwidth-name'] .
        '&limit-value=' . $vars['bandwidth-value'],
        "PUT"
    );
}

// Redirect back.
header('Location: ' . $_SERVER['HTTP_REFERER']);
}

// Call function.
S3_setLimitsForBucket($_GET);

?>

```

Querying bucket limits in WHMCS

You can display the current limits with the `ostor-limits` service and parameter `bucket` specifying the bucket name. WHMCS displays the bucket limits in S3 cluster when you click the **Get** button. Create a file `S3_getLimitsForBucket.php` with the following contents:

```

<?php

// Load configuration and libraries.
require('../../includes/staas_scripts/S3_getConfig.php');
require('../../includes/staas_scripts/S3_requestCurl.php');
require('../../init.php');

// Get s3 bucket limits.
function S3_getLimitsForBucket($bucket) {

    // Load configuration.
    $s3_config = s3_getConfig();

    // Get s3 user limits.
    $s3_client = S3_requestCurl(
        $s3_config['s3_key'],
        $s3_config['s3_secret'],
        $s3_config['s3_gateway'],
        "?ostor-limits&bucket=" . $bucket,
        "GET"
    );

    // Store s3 result.
    $_SESSION['s3_limits_bucket'] = $s3_client;
    $_SESSION['s3_bucket'] = $bucket;

    // Redirect back.
}

```

```

    header('Location: ' . $_SERVER['HTTP_REFERER']);
}

// Call function.
S3_getLimitsForBucket($_GET['bucket']);

?>

```

Client Profile

Summary Profile Contacts Products/Services Domains Billable Items Invoices Quotes Transactions Emails Notes (2) Log

#4 - Exempt from Tax: **No** Auto CC Processing: **Yes** Send Overdue Reminders: **Yes** Apply Late Fees: **Yes**

S3 Limits for Bucket: client		
Type	Name	Value
ops	default	0.00
ops	get	3600.00
ops	put	0.00
ops	list	0.00
ops	delete	0.00
bandwidth	out	100

Clients Information	Invoices/Billing	Products/Services	Other Actions
First Name Last Name Company Name Email Address client@example.com Address 1 Landsberger Straße 110 Address 2 City Munich State/Region Bayern Postcode 80339 Country DE - Germany	Paid 0 (€0.00 EUR) Draft 0 (€0.00 EUR) Unpaid/Due 0 (€0.00 EUR) Cancelled 0 (€0.00 EUR) Refunded 0 (€0.00 EUR) Collections 0 (€0.00 EUR) Income 40.00 EUR Credit balance €0.00 EUR Create Invoice	Shared Hosting 0 (0 Total) Reseller Hosting 0 (0 Total) VPS/Server 0 (0 Total) Product/Service 0 (0 Total) Domains 0 (0 Total) Accepted Quotes 0 (0 Total) Support Tickets 0 (0 Total) Affiliate Signups 0 View Orders	S3 - User Management Create User Delete User Enable User Disable User Generate Access Key Revoke Access Key Query User (on/off) List Users (on/off)

Deleting bucket limits in WHMCS

You can delete the current limits with the `ostor-limits` service and parameter `bucket` specifying the bucket name. WHMCS removes the bucket limits from S3 cluster when you click the **Delete** button. Create a file `S3_deleteLimitsForBucket.php` with the following contents:

```

<?php

// Load configuration and libraries.
require('../includes/staas_scripts/S3_getConfig.php');
require('../includes/staas_scripts/S3_requestCurl.php');
require('../init.php');

// Delete s3 bucket limits.
function S3_deleteLimitsForBucket($bucket) {

    // Load configuration.
    $s3_config = s3_getConfig();

    // Delete s3 bucket limits.
    S3_requestCurl(
        $s3_config['s3_key'],
        $s3_config['s3_secret'],
        $s3_config['s3_gateway'],
        "?ostor-limits&bucket=" . $bucket,
        "DELETE"
    );
}

```

```

// Clear array.
$_SESSION['s3_limits_bucket'] = null;

// Redirect back.
header('Location: ' . $_SERVER['HTTP_REFERER']);
}

// Call function.
S3_deleteLimitsForBucket($_GET['bucket']);

?>

```

Obtaining usage statistics in WHMCS

This section describes how to obtain usage statistics via in WHMCS for billing or other purposes.

Note

Delete statistics objects after collecting the required data.

Listing statistics objects in WHMCS

You can list all available statistics objects with the `ostor-usage` service and no parameters. The output only contains objects that have not been deleted. WHMCS lists the available statistics objects from S3 cluster when you click **List statistics objects (on/off)**. Create a file `S3_listStatsObjects.php` with the following contents:

```

<?php

// Load configuration and libraries.
require('../../includes/staas_scripts/S3_getConfig.php');
require('../../includes/staas_scripts/S3_requestCurl.php');
require('../../init.php');

// List s3 statistics objects.
function S3_listStatsObjects() {

    // Hide now.
    if ($_SESSION['s3_stat_objects'] == 1) {

        // Hide.
        $_SESSION['s3_stat_objects'] = 0;

        // Redirect back.
        header('Location: ' . $_SERVER['HTTP_REFERER']);

        // Return immediately.
        return;
    }
}

```

```

// Load configuration.
$s3_config = s3_getConfig();

// Get s3 statistics objects.
$s3_client = S3_requestCurl(
    $s3_config['s3_key'],
    $s3_config['s3_secret'],
    $s3_config['s3_gateway'],
    "?ostor-usage",
    "GET"
);

// Store s3 result.
$_SESSION['s3_stat_objects'] = 1;
$_SESSION['s3_stat'] = $s3_client;

// Redirect back.
header('Location: ' . $_SERVER['HTTP_REFERER']);
}

// Call function.
S3_listStatsObjects();

?>

```

Client Profile

#4 - Exempt from Tax: **No** Auto CC Processing: **Yes** Send Overdue Reminders: **Yes** Apply Late Fees: **Yes**

S3 Statistics List

Object Name
s3-usage-800000000000017-2017-03-21T12:38:36.000Z-1800

Clients Information	Invoices/Billing	Products/Services	Other Actions
<p>First Name</p> <p>Last Name</p> <p>Company Name</p> <p>Email Address: client@example.com</p> <p>Address 1: Landsberger Straße 110</p> <p>Address 2</p> <p>City: Munich</p> <p>State/Region: Bayern</p> <p>Postcode: 80339</p> <p>Country: DE - Germany</p> <p>Phone Number: +4989561372840</p> <p>Reset & Send Password</p> <p>Credit Card Information</p> <p>Login as Client</p>	<p>Paid: 0 (€0.00 EUR)</p> <p>Draft: 0 (€0.00 EUR)</p> <p>Unpaid/Due: 0 (€0.00 EUR)</p> <p>Cancelled: 0 (€0.00 EUR)</p> <p>Refunded: 0 (€0.00 EUR)</p> <p>Collections: 0 (€0.00 EUR)</p> <p>Income: €0.00 EUR</p> <p>Credit balance: €0.00 EUR</p> <p>Create Invoice</p> <p>Create Add Funds Invoice</p> <p>Generate Due Invoices</p> <p>Add Billable Item</p> <p>Manage Credits</p> <p>Create New Invoice</p>	<p>Shared Hosting: 0 (0 Total)</p> <p>Reseller Hosting: 0 (0 Total)</p> <p>VPS/Server: 0 (0 Total)</p> <p>Product/Service: 0 (0 Total)</p> <p>Domains: 0 (0 Total)</p> <p>Accepted Quotes: 0 (0 Total)</p> <p>Support Tickets: 0 (0 Total)</p> <p>Affiliate Signups: 0</p> <p>View Orders</p> <p>Add New Order</p>	<p>S3 - User Management</p> <p>Create User</p> <p>Delete User</p> <p>Enable User</p> <p>Disable User</p> <p>Generate Access Key</p> <p>Revoke Access Key</p> <p>Query User (on/off)</p> <p>List Users (on/off)</p> <p>S3 - User Limits Management</p> <p>default ops/s</p> <p>out bandwidth/s</p>

Files
No files uploaded

Querying statistics objects in WHMCS

You can display usage statistics with the `ostor-usage` service and parameter `obj` specifying the statistics object. WHMCS displays the accessed buckets, user ID, and counters when you click the **Get** button. Create a file `S3_getStatsForObject.php` with the following contents:

```

<?php

// Load configuration and libraries.

```

```

require('../../includes/staas_scripts/S3_getConfig.php');
require('../../includes/staas_scripts/S3_requestCurl.php');
require('../../init.php');

// Get s3 statistics object.
function S3_getStatsObjects($object) {

    // Load configuration.
    $s3_config = s3_getConfig();

    // Get s3 statistics object.
    $s3_client = S3_requestCurl(
        $s3_config['s3_key'],
        $s3_config['s3_secret'],
        $s3_config['s3_gateway'],
        "?ostor-usage&obj=" . $object,
        "GET"
    );

    // Store s3 result.
    $_SESSION['s3_object_statistic'] = $s3_client;
    $_SESSION['s3_object'] = $object;

    // Redirect back.
    header('Location: ' . $_SERVER['HTTP_REFERER']);
}

// Call function.
S3_getStatsObjects($_GET['object']);

?>

```

Client Profile

Summary Profile Contacts Products/Services Domains Billable Items Invoices Quotes Transactions Emails Notes (2) Log

#4 - Exempt from Tax: **No** Auto CC Processing: **Yes** Send Overdue Reminders: **Yes** Apply Late Fees: **Yes**

S3 Statistics for Object: s3-usage-800000000000017-2017-03-21T12:38:36.000Z-1800

fmt_version	service_id	start_ts	period	bucket	epoch	user_id	tag	put	get	list	other	uploaded	downloaded
1	80000000000000017	1490099916	1828	client	98305			6	0	12	0	987604	0
1	80000000000000017	1490099916	1828	client	90113			0	0	4	0	0	0
1	80000000000000017	1490099916	1828		0			1	9	0	0	153	0

Clients Information

First Name
Last Name
Company Name
Email Address client@example.com
Address 1 Landsberger StraÙe 110
Address 2
City Munich
State/Region Bayern
Postcode 80339
Country DE - Germany
Phone Number +498961372840
[Reset & Send Password](#)

Invoices/Billing

Paid 0 (€0.00 EUR)
Draft 0 (€0.00 EUR)
Unpaid/Due 0 (€0.00 EUR)
Cancelled 0 (€0.00 EUR)
Refunded 0 (€0.00 EUR)
Collections 0 (€0.00 EUR)
Income €0.00 EUR
Credit Balance €0.00 EUR

[Create Invoice](#)
[Create Add Funds Invoice](#)
[Generate Due Invoices](#)
[Add Billable Item](#)

Products/Services

Shared Hosting 0 (0 Total)
Reseller Hosting 0 (0 Total)
VPS/Server 0 (0 Total)
Product/Service 0 (0 Total)
Domains 0 (0 Total)
Accepted Quotes 0 (0 Total)
Support Tickets 0 (0 Total)
Affiliate Signups 0

[View Orders](#)
[Add New Order](#)

Other Actions

S3 - User Management

[Create User](#)
[Delete User](#)
[Enable User](#)
[Disable User](#)
[Generate Access Key](#)
[Revoke Access Key](#)
[Query User \(on/off\)](#)
[List Users \(on/off\)](#)

S3 - User Limits Management

Deleting statistics objects in WHMCS

You can delete existing statistics objects with the `ostor-usage` service and parameter `obj` specifying the statistics object. WHMCS removes the statistics object from S3 cluster when you click the **Delete**

button. Create a file `S3_deleteStatsForObject.php` with the following contents:

```
<?php

// Load configuration and libraries.
require('../../includes/taas_scripts/S3_getConfig.php');
require('../../includes/taas_scripts/S3_requestCurl.php');
require('../../init.php');

// Delete s3 statistics object.
function S3_deleteStatsForObject($object) {

    // Load configuration.
    $s3_config = s3_getConfig();

    // Delete s3 statistics object.
    S3_requestCurl(
        $s3_config['s3_key'],
        $s3_config['s3_secret'],
        $s3_config['s3_gateway'],
        "?ostor-usage&obj=" . $object,
        "DELETE"
    );

    // Clear array.
    $_SESSION['s3_limits_bucket'] = null;

    // Redirect back.
    header('Location: ' . $_SERVER['HTTP_REFERER']);
}

// Call function.
S3_deleteStatsForObject($_GET['object']);

?>
```